



the angle of tilt. Fig. 2 indicates the required tilt with a suggested pole arrangement and dimensions pertaining thereto. Two particular sizes should be of interest to amateurs, one of which will have maximum efficiency from 3.5 Mc. to

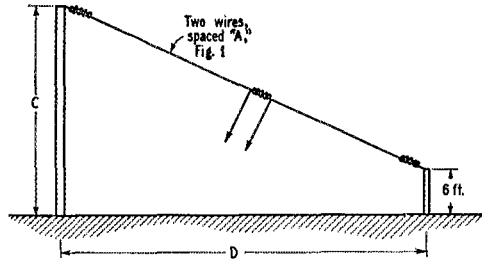


Fig. 2 — Tilting the terminated folded dipole tends to make the pattern nondirectional. For dimensions C and D, see text.

17.5 Mc. and the other being optimum from 7 Mc. to 35 Mc. Dimensions may be developed using the formulas set forth to cover higher-frequency bands, but at 28 Mc. and higher frequencies directional arrays are easy to construct and preferable because of the increased gain. The following dimensions are applicable to the frequency ranges selected above:

Dimension	3.5 to 17.5 Mc.	7 to 35 Mc.
(Figs. 1 and 2)		
A	2 ft. 10 in.	1 ft. 6 in.
B	46 ft. 10 in.	23 ft. 5 in.
C	56 ft. 0 in.	32 ft. 0 in.
D	80 ft. 0 in.	44 ft. 0 in.

For an impedance of 600 ohms, the center-to-center spacing of the feeder wires, divided by the diameter of the feeder wires, must equal 70. This means that No. 12 wire spaced six inches will be acceptable. Six-inch spreaders are readily available and the wire will not stretch unduly. No. 10 wire should be spaced 7 inches and No. 16 wire should be spaced 3½ inches.

**Terminating Resistor**

The terminating resistor should be non-inductive and have a minimum rating equal to 35 per cent of the input power to the final stage. It may be a carbon or graphite rod, adequately protected from the elements, or merely a long 600-ohm transmission line constructed of resistance wire. If the latter is used, the line may be carried vertically down from the center of one leg of the antenna to a short pole and then, if required, extended to one of the masts and doubled back and forth between the masts. If a carbon resistor is used, there is apparently no difference whether the rod is connected directly into the antenna as shown in Fig. 3, or at the end of a transmission line, as shown in Fig. 1. However, it is easier to adjust the resistance and

protect it from the elements when it is installed at a fixed location on the ground than when it is suspended across an insulator in the antenna wire.

**Formulas**

The following formulas will be of assistance in developing antennas for different frequency coverages:

Antenna-wire spacing (A) =  $\frac{3000}{f \text{ (kc.)}} \times 3.28$   
for lowest frequency

Antenna length, each half (B) =  $\frac{50,000}{f \text{ (kc.)}} \times 3.28$   
for lowest frequency

To convert decimal parts of one foot into inches, multiply by 12.

One meter = 3.28 feet.

Frequency (kc.) =  $\frac{300,000}{\lambda \text{ (meters)}}$

The length of the antenna and the wire spacing may well be the object of further experiments but initial tests indicate that the first two formulas shown above are reasonably accurate and that the system is operable over a 5-to-1 frequency range as previously mentioned.

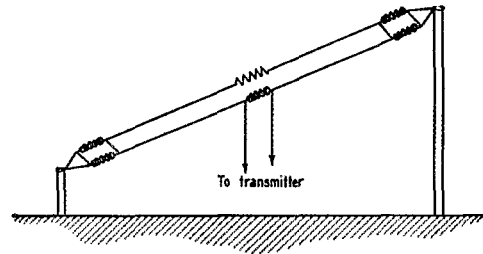


Fig. 3 — The terminating resistor may be placed directly in the antenna, or at the end of a transmission line as indicated in Fig. 1.

Initial tests with these antennas indicate no change in signal strength on 40 meters at a distance of 2000 miles when compared with a conventional half-wave antenna, center fed with tuned feeders and carefully adjusted for optimum output at one selected frequency. Good reports were received on both 20 and 80 meters but comparative reports are not available because of the lack of antennas specifically designed for those bands. Transmitter loading was normal.

**NATIONAL  
EMERGENCY FREQUENCIES**

<b>C.W.</b>	<b>'PHONE</b>
7100 kc. (day)	3875 kc.
3550 kc. (night)	

During periods of communications emergency these channels will be monitored by stations of the National Emergency Net for the handling of third-party personal-inquiry traffic.