



# Station Description

09 Aug 2019

Dave Typinski

## C O N T E N T S

Observatory Outline	1
TFD Array Schematic	4
TFD Array Feed Losses	5
TFD Array Element Sweeps	6
Riometer Array Schematic	8
Riometer Array Feed Losses	9
Riometer Array Element Sweeps	10
Antenna Feed Control	12
Receivers	13
Calibration Temperatures – TFD Array	14
Calibration Temperatures – Riometer Array	15
Power Distribution	16
TFD Array Beam Steering	17
Terrestrial Beam Heading Map	23
Magnetic Declination	24
Facility Layout	26
Location Within North America	27



26211 W US Hwy 27  
PO Box 2423  
High Springs, FL 32655

Contact: Dave Typinski  
[davetyp@typnet.net](mailto:davetyp@typnet.net)  
(386)344-3166

## OBSERVATORY OUTLINE

### Location

29° 50' 13" N      29.8369° N      EL89qu  
82° 37' 17" W      82.6214° W  
53 ft (16 m) MSL

### Antennas

#### TFD Array

Two square arrays on a NS line, eight 30-foot TFD elements, beam steering in 5° increments NS and 15° increments EW.

16 MHz HPBW at zenith: 18° NS x 40° EW  
20 MHz HPBW at zenith: 15° NS x 35° EW, D ≈ 14 dBic  
24 MHz HPBW at zenith: 12° NS x 30° EW  
32 MHz HPBW at zenith: 8° NS x 20° EW  
For more about the TFD Array, see: [The DPS and TFD Array](#)

#### Riometer Array

Standard Radio Jove dual-dipole array, 20' element spacing, 12' wire height, 23'1" driven elements, 24'4" reflectors 7'6" directly beneath driven elements, no phasing (zenith beam steering).

20 MHz HPBW at zenith: 72° NS x 74° EW, D ≈ 8.3 dBi

### Receivers

#### Dual Polarization Spectrograph (DPS)

24 x 7 x 365 unattended operation  
16–32 MHz, simultaneous (correlated) RCP and LCP  
300 channels per polarization (600 total)  
Swept frequency, selectable 7.5, 15, 30, 60 kHz pre-detection BW  
~ 6.7 sweeps/sec, integration time = 500 μs per sample  
Frequency resolution = 53 kHz, Δt = 150 ms  
For more about the DPS, see: [The DPS and TFD Array](#)

## Receivers (cont'd)

### Radio Jove Receivers

24 x 7 x 365 unattended operation  
~ 20.1 MHz, uncorrelated RCP and LCP  
7 kHz RF BW folded via direct conversion into a baseband  
3.5 kHz pre-detection audio BW  
Integration time = 100 ms per sample  
For more about the Jove Receivers, See: [Radio Jove Receiver Manual](#)

### Icom R8500 + 10.7 MHz Jove Receiver

24 x 7 x 365 unattended operation  
20.1 MHz, East-West linear polarization  
7 kHz RF BW folded via direct conversion into a baseband  
3.5 kHz pre-detection BW  
Integration time = 100 ms per sample

### Tunable Wideband Receiver (TWB) Mark III

Attended operation only  
Tunable from 16 to 32 MHz, RCP or LCP  
2 MHz IF BW direct to high speed digitizer  
FFT post-processing, RBW = 4.88 kHz,  $\Delta t = 205 \mu s$   
For more about the TWB, see: [The TWB](#)

## Sensitivity

Formal sensitivity calculations and measurements have not been made. A rough estimate considering only the number of dipoles is a 20 MHz on-axis and at zenith  $3\sigma$  sensitivity on the order of 100 kJy. All receivers presently in use have noise figures between 6 and 8 dB, making their internal noise of little concern given the modest losses between the TFD array and the receivers and the fact that in the upper HF band, system noise is dominated by the galactic background emission.

## Timing

All radio telescope data collection systems use a PC's internal clock to apply timestamps to the data. Each PC runs a service, Meinberg NTP daemon, to keep its system clock within a few milliseconds of UTC using Network Time Protocol (NTP). The NTP server is a GPS-ntp-pi stand-alone unit using GPS and GLONASS signals to determine and provide the correct time on the local network. Future work includes upgrading the spectrographs to a GPS-based hardware system with firmware modification to keep the start of each frequency sweep disciplined to within a hundred nanoseconds of UTC.

For more information, see: [GPS-NTP Pi](#)

For more information, see: [Meinberg NTP Server](#) and [Meinberg NTP Server Monitor](#)

## Calibration

All radio telescope systems are calibrated in terms of antenna temperature using a noise source of known temperature calibrated against a 5722 noise diode. An automatic calibrator runs a step calibration on all receivers a fixed number of hours before and after Jupiter transit (usually 3 hours when Jupiter's elongation is < 90° and 4.5 hours when Jupiter's elongation is > 90°), every day. The step cal runs in 17 steps of 5 seconds each separated by 3 dB, ranging from 4.3 kK to 250 MK equivalent antenna temperature.

For more information see: [5722 Noise Generator](#)

For more information see: [AJ4CO Automatic Calibrator](#)

## Computers

Three identical PCs are used to record data from the receivers. Each has a 2.4 GHz AMD Opteron dual-core processor, 4 GB RAM, and a 1 TB hard drive. All run Windows XP SP3. All are connected to the observatory LAN.

## Internet

The observatory has internet access via a 6 Mbps DSL connection. This connection allows the Radio Sky Pipe (RSS) and Radio Sky Spectrograph (RSS) software to serve data to interested remote observers.


## Power

The receivers, computers, and network hardware are fed by six 1.5 kVA battery backup units providing at least 15 minutes of power if the AC mains fail.

## Operations

Several radio telescopes operate all day, every day (see "Receivers" above). Useful Jupiter observations are made any time Jupiter is within 3 hours of transit, but this is extended to around 4.5 hours when Jupiter's transit elevation is greater than 70° and Jupiter is near opposition.

**North**

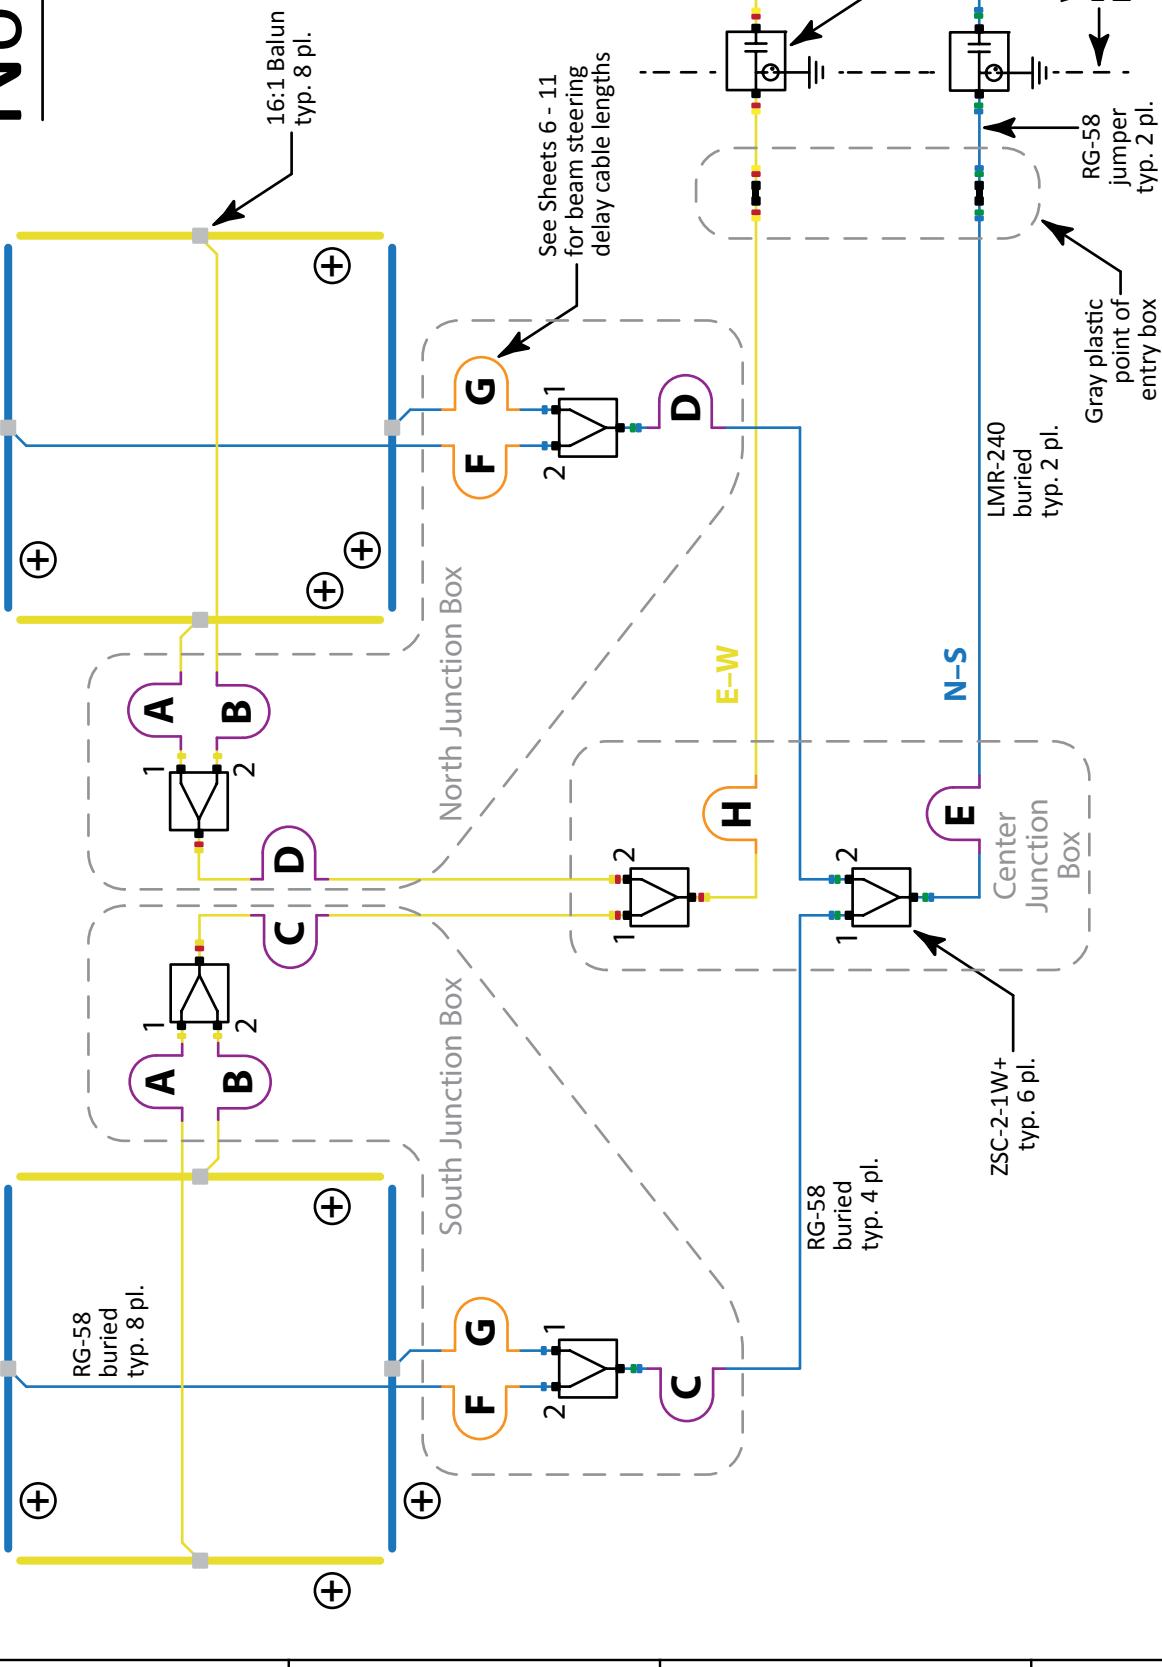

30' folded dipoles, top wire 9'2" height,  
8" wire spacing, 32' element spacing,  
800 Ω termination resistors, 16:1 baluns.

## TFD Array - Electrical



REV A		PART NUMBER N/A		DRAWN BY DAVE TYPINSKI		SHEET 1 OF 1	
SIZE A	DATE 28 MAR 2015	SCALE NONE	BY				

## TFD Array Feed System Losses

**D** Feed line loss sweeps performed 28 Mar 2015      **C** Device sweeps performed 11 Aug 2013

Freq (MHz)	One Way Loss (dB)	One Way Loss (dB)	Outer J-box to element balun RG-58	AJ4CO BALUN 16-1A 16:1 Balun (one)	Mini-Circuits ZSC-2-1W+ Combiners <b>(two)</b>	<b>B</b> Synergy DQK-701B 90° Hybrid (one)	
						Loss (dB)	Loss (dB)
16	-0.99	-0.94	-0.75	-0.33	-0.52	-0.40	-3.9
18	-1.04	-0.99	-0.79	-0.35	-0.54	-0.41	-4.1
<b>20</b>	<b>-1.09</b>	<b>-1.03</b>	<b>-0.84</b>	<b>-0.37</b>	<b>-0.55</b>	<b>-0.42</b>	<b>-4.3</b>
22	-1.15	-1.07	-0.89	-0.39	-0.57	-0.43	-4.5
24	-1.20	-1.11	-0.93	-0.40	-0.58	-0.44	-4.7
26	-1.24	-1.16	-0.97	-0.42	-0.59	-0.45	-4.8
<b>B</b>	<b>28</b>	<b>-1.28</b>	<b>-1.20</b>	<b>-1.00</b>	<b>-0.45</b>	<b>-0.60</b>	<b>-0.47</b>
30	-1.32	-1.23	-1.04	-0.46	-0.61	-0.49	-5.2
32	-1.36	-1.27	-1.09	-0.46	-0.62	-0.50	-5.3
							-0.27

<b>A</b> TFD Array Feed System Losses		SIZE	DATE	PART NUMBER	REV
<b>AJ4CO</b> OBSERVATORY		A	25 FEB 2017	<b>N/A</b>	<b>A</b>
		SCALE	NONE	DRAWN BY DAVE TYPINSKI	SHEET 1 OF 1


AJ4C  
OBSERVATORY

SIZE A DATE 24 AUG 2014 PART NUMBER N/A

SCALE NONE DRAWN BY DAVE TYPINSKI

REV A SHEET 1 OF 2





## TFD Array 30' Element Sweeps

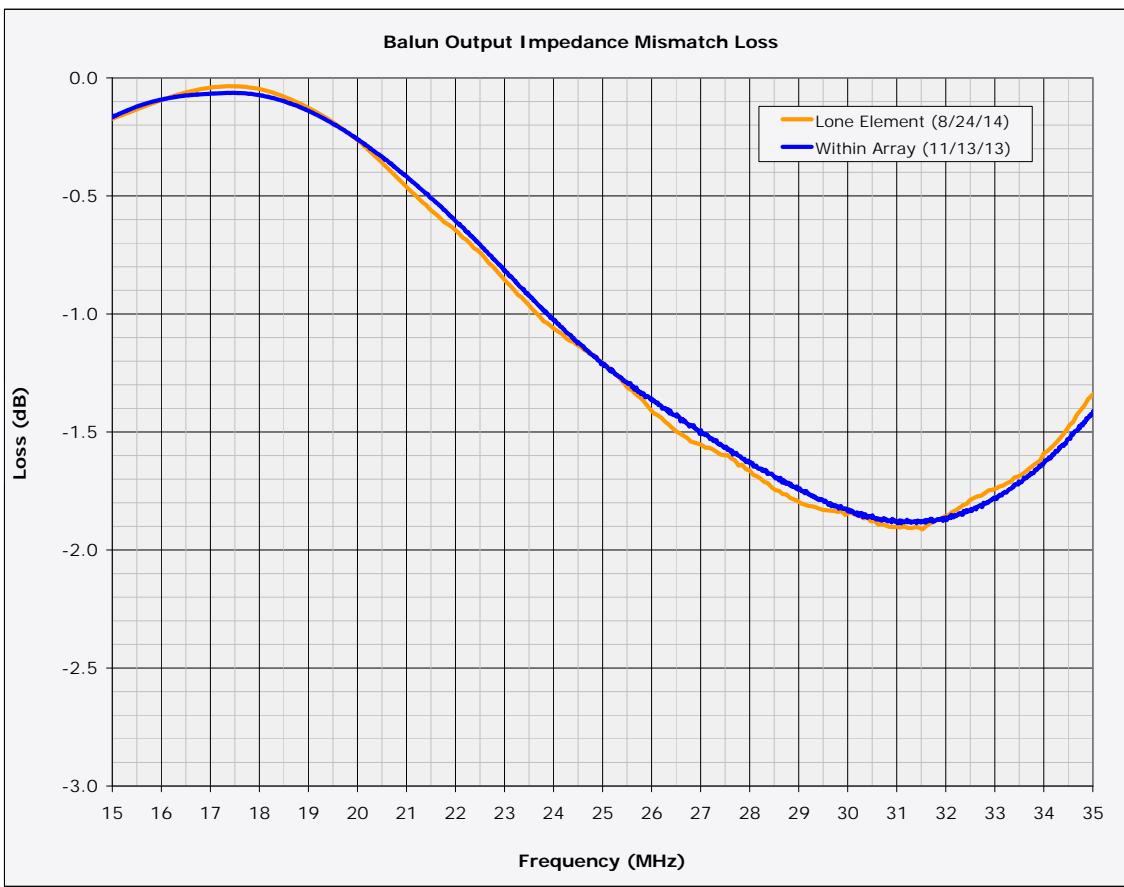

Element sweeps performed with a VNA-2180.


A

Page 6 of 27

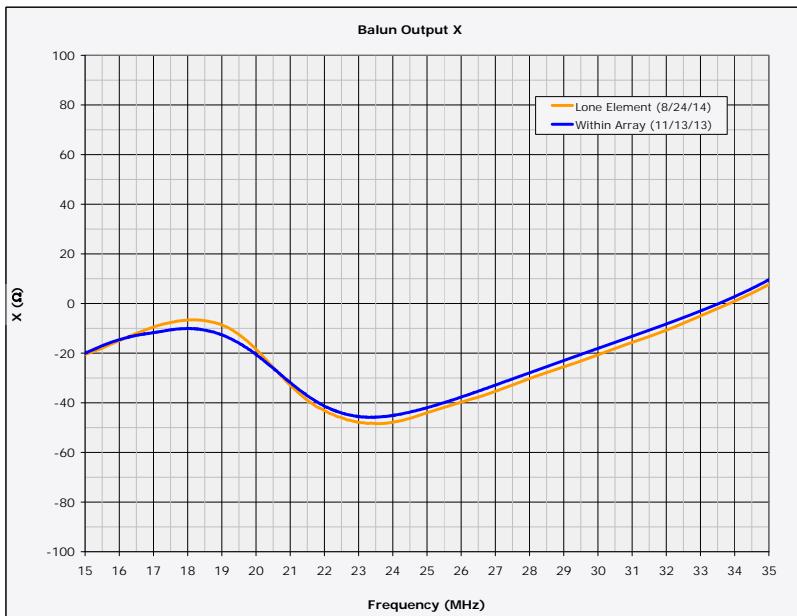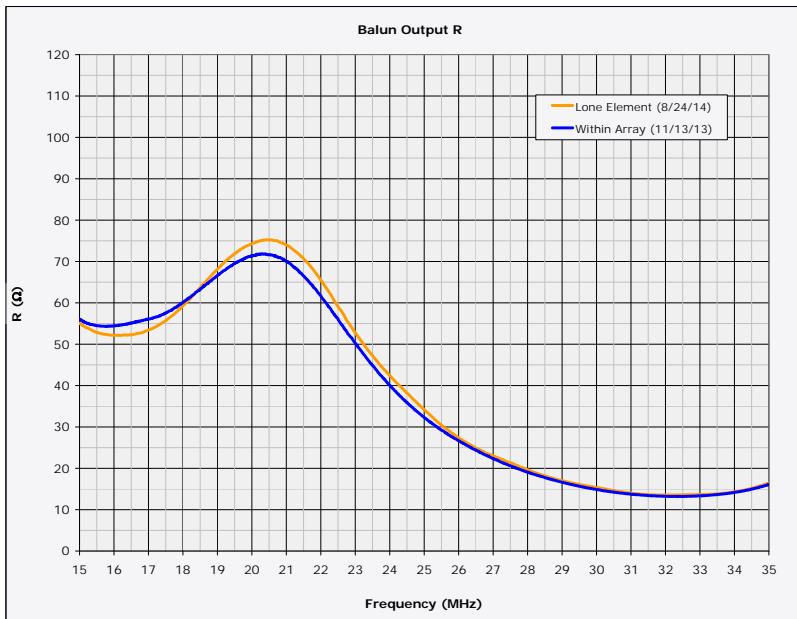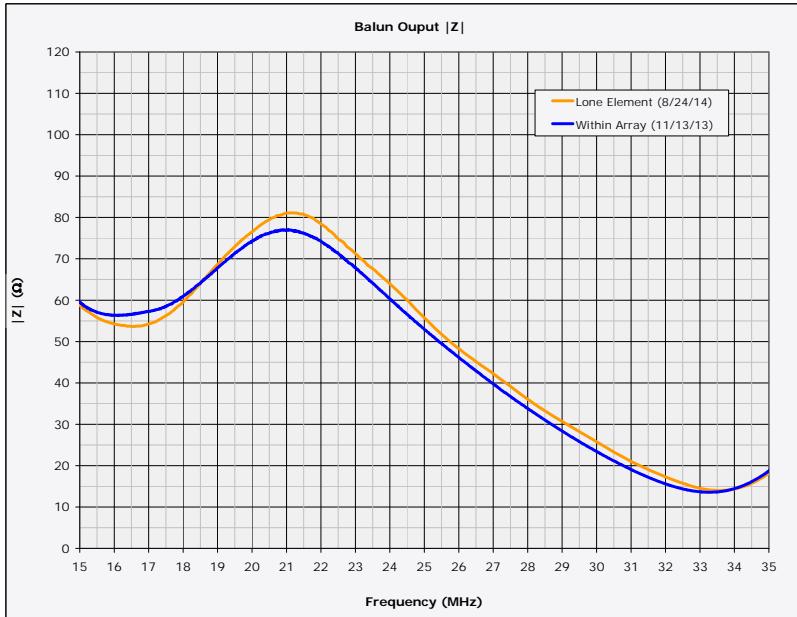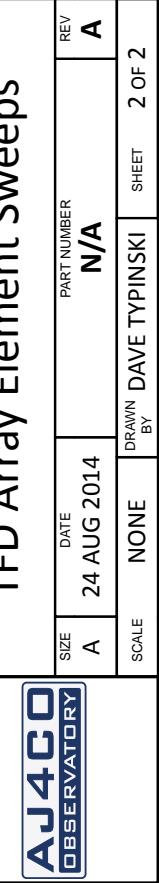

Element sweeps performed with a VNA-2180.

**North**

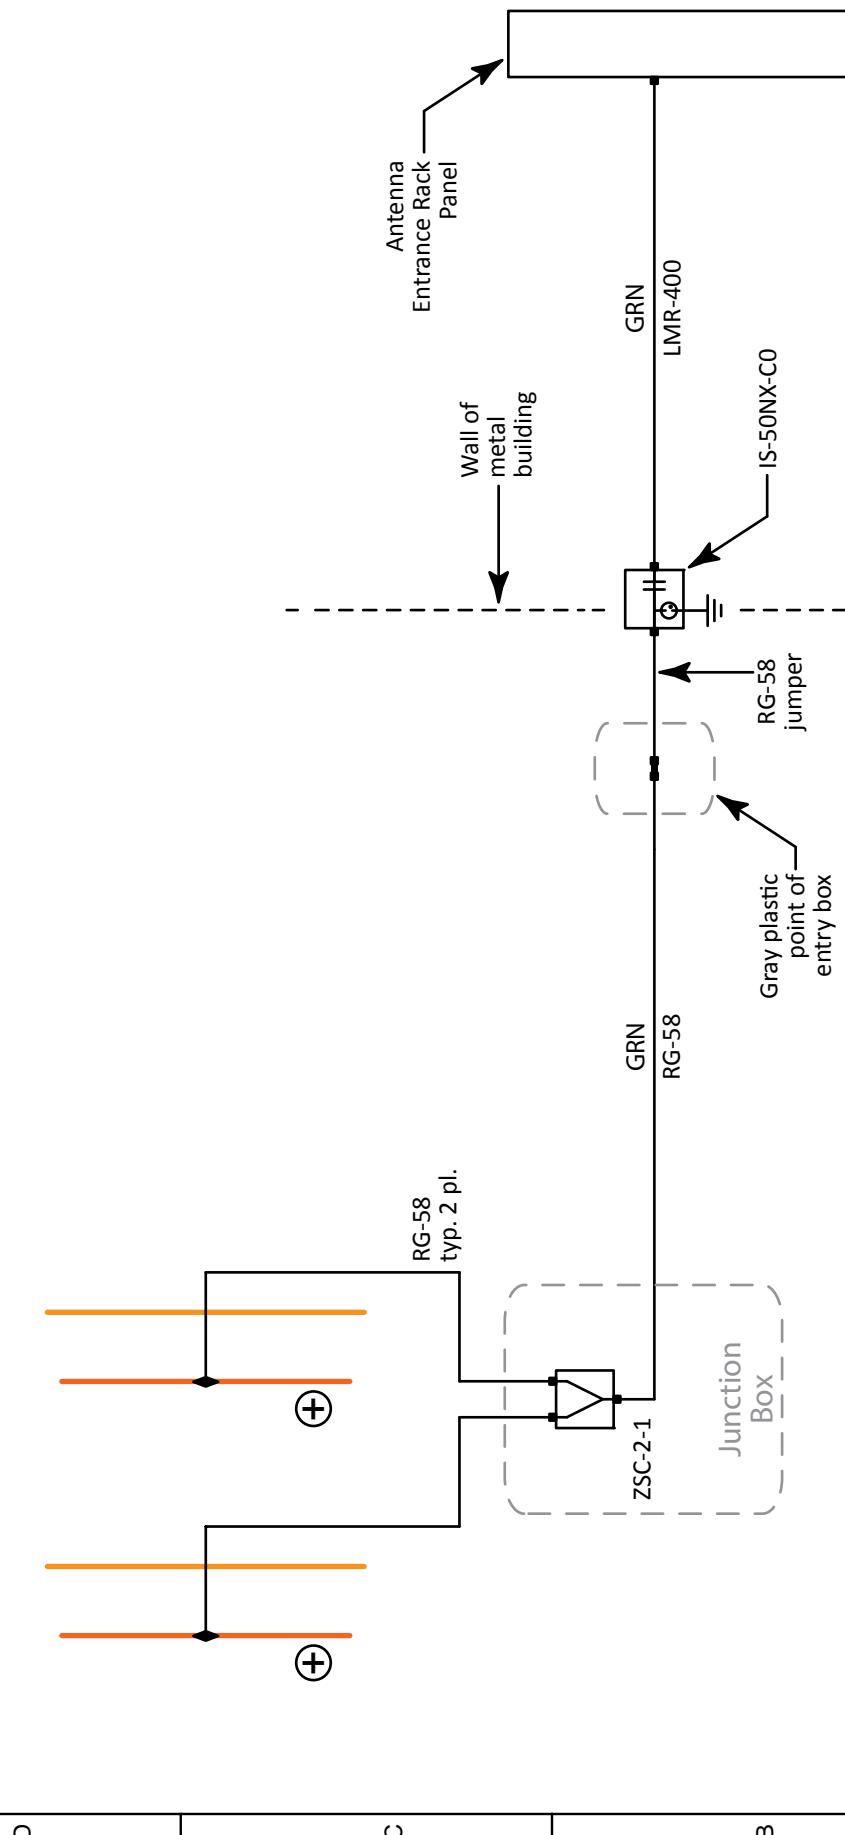

20' N-S spacing  
12' element height  
23 1" driven elements  
24 4" reflectors 7' 6" below drivers

## Riometer Array - Electrical

AJ4C OBSERVATORY		SIZE A	DATE 25 FEB 2017	PART NUMBER N/A	REV A
SCALE	NONE	DRAWN BY DAVE TYPINSKI	SHEET 1 OF 1		
2	3	4	3	2	1

## Riometer Array Feed System Losses

Feed line loss sweeps  
performed 22 Jun 2017



Rack panel to gray point of entry box LMR-400	Gray box to J-box RG-58	J-box to element RG-58	Mini-Circuits ZSC-2-1 Combiner	Loss Between Element Feed Points and Entrance Panel (CAL PLANE) (dB)
Freq (MHz)	One Way Loss (dB)	One Way Loss (dB)	One Way Loss (dB)	Loss (dB)
16	-1.00	-1.09	-0.61	-0.20
18	-1.06	-1.15	-0.66	-0.21
<b>20</b>	<b>-1.11</b>	<b>-1.23</b>	<b>-0.69</b>	<b>-0.21</b>
22	-1.17	-1.29	-0.73	-0.22
24	-1.21	-1.35	-0.77	-0.22
26	-1.26	-1.42	-0.80	-0.23
28	-1.30	-1.47	-0.85	-0.24
30	-1.35	-1.53	-0.88	-0.24
32	-1.39	-1.59	-0.91	-0.25

Device sweeps performed  
11 Aug 2013

C	D
	Loss Between Element Feed Points and Entrance Panel (CAL PLANE) (dB)

## Riometer Array Feed Losses

A.J.4.C. OBSERVATORY	SIZE A	DATE 22 JUN 2017	PART NUMBER N/A	REV A
	SCALE NONE	DRAWN BY DAVE TYPINSKI	SHEET 1 OF 1	
	2			
	3			
	4			

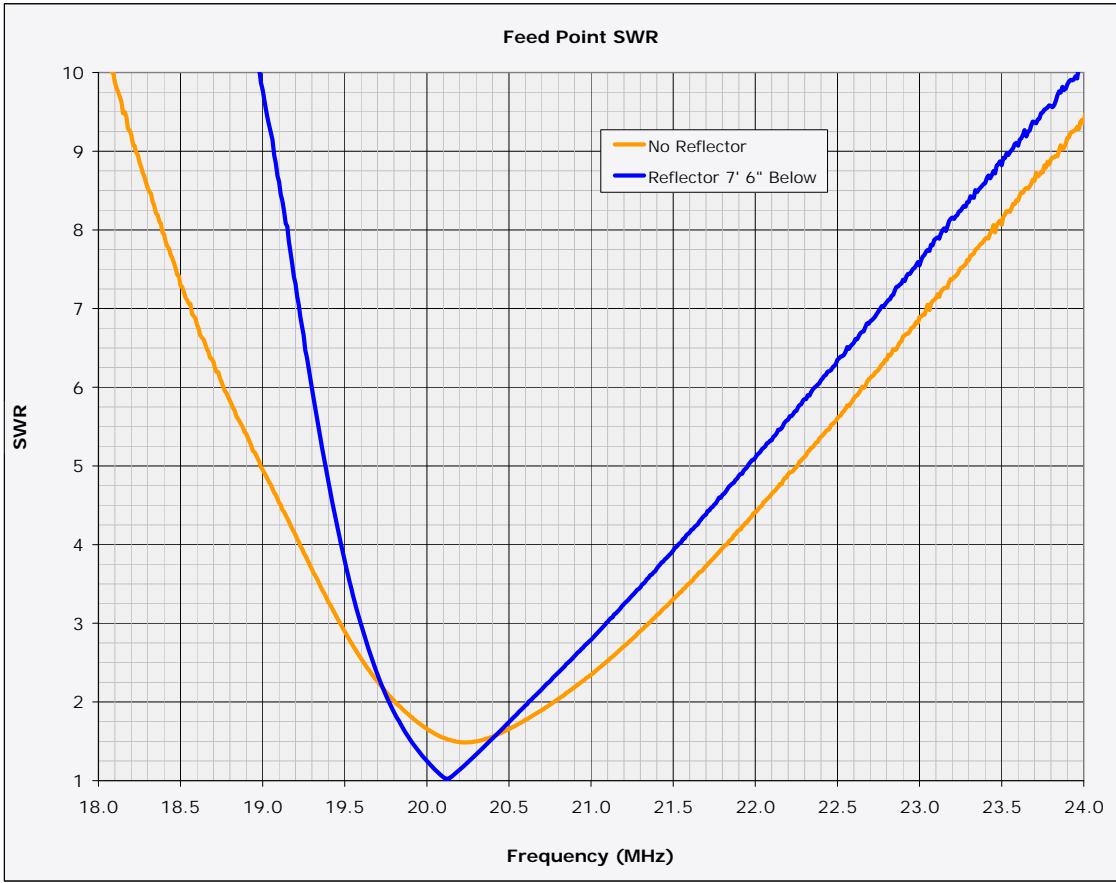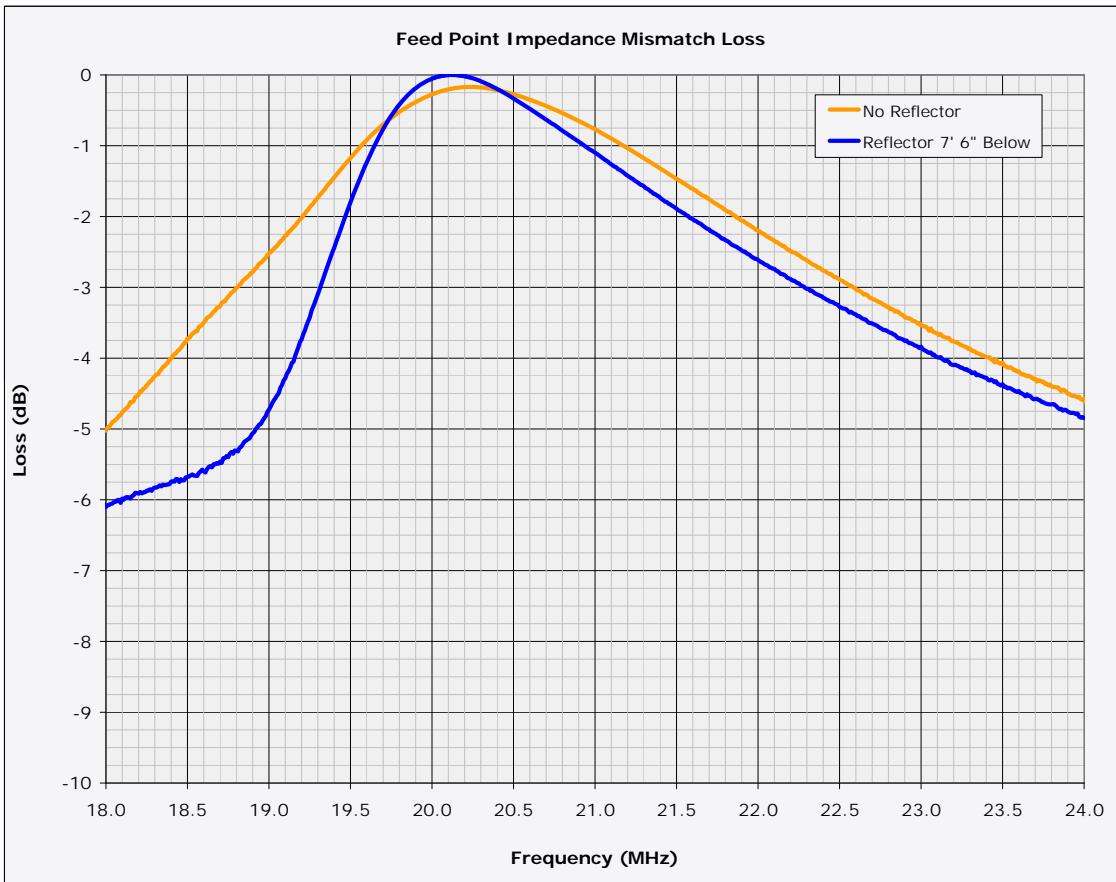


Element sweeps performed with a VNA-2180.




## Riometer Array Element Sweeps



SIZE		DATE	PART NUMBER	REV
A		04 FEB 2017	N/A	A
SCALE	NONE	DRAWN BY	DAVE TYPINSKI	SHEET 1 OF 2
2				1

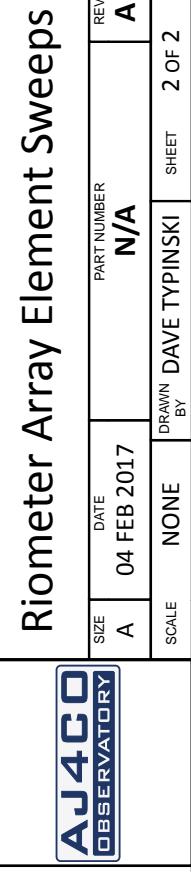



Element sweeps performed with a VNA-2180.

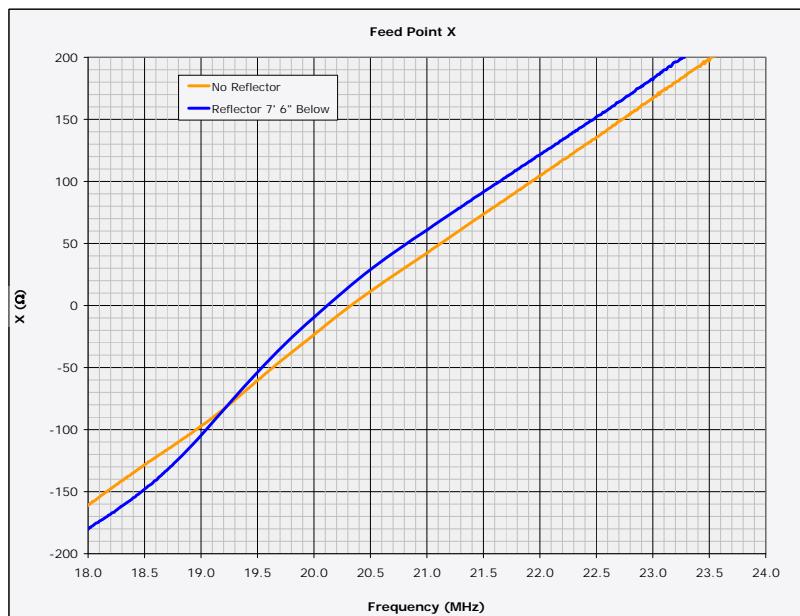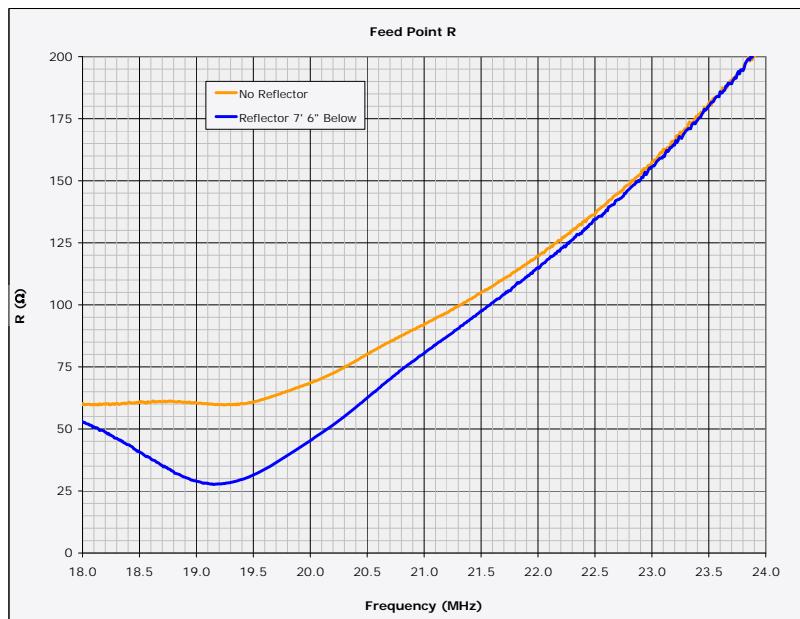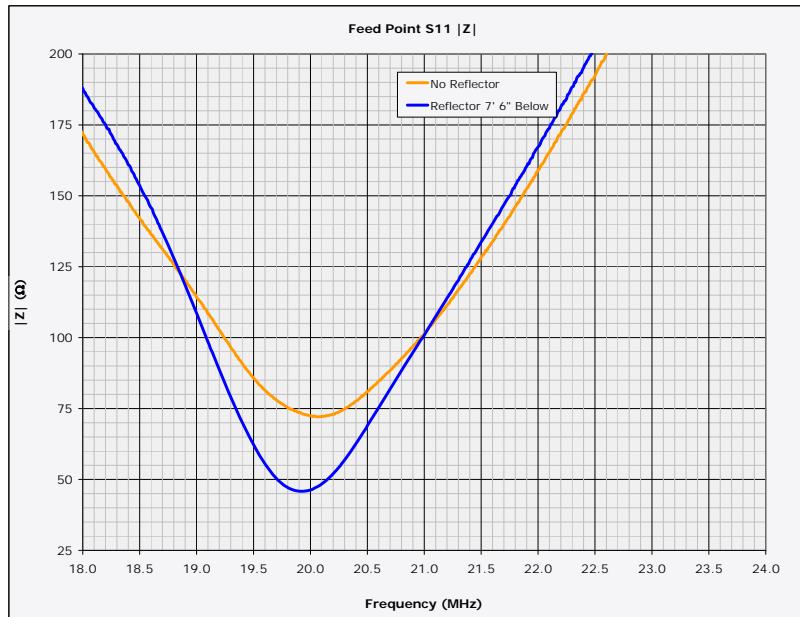

# Antenna Feed Control

AJ4C OBSERVATORY		SIZE A	DATE 18 JUN 2017	PART NUMBER N/A	REV K
		SCALE NONE	DRAWN BY DAVE TYPINSKI	SHEET 1 OF 1	
1	2	3	4	5	6

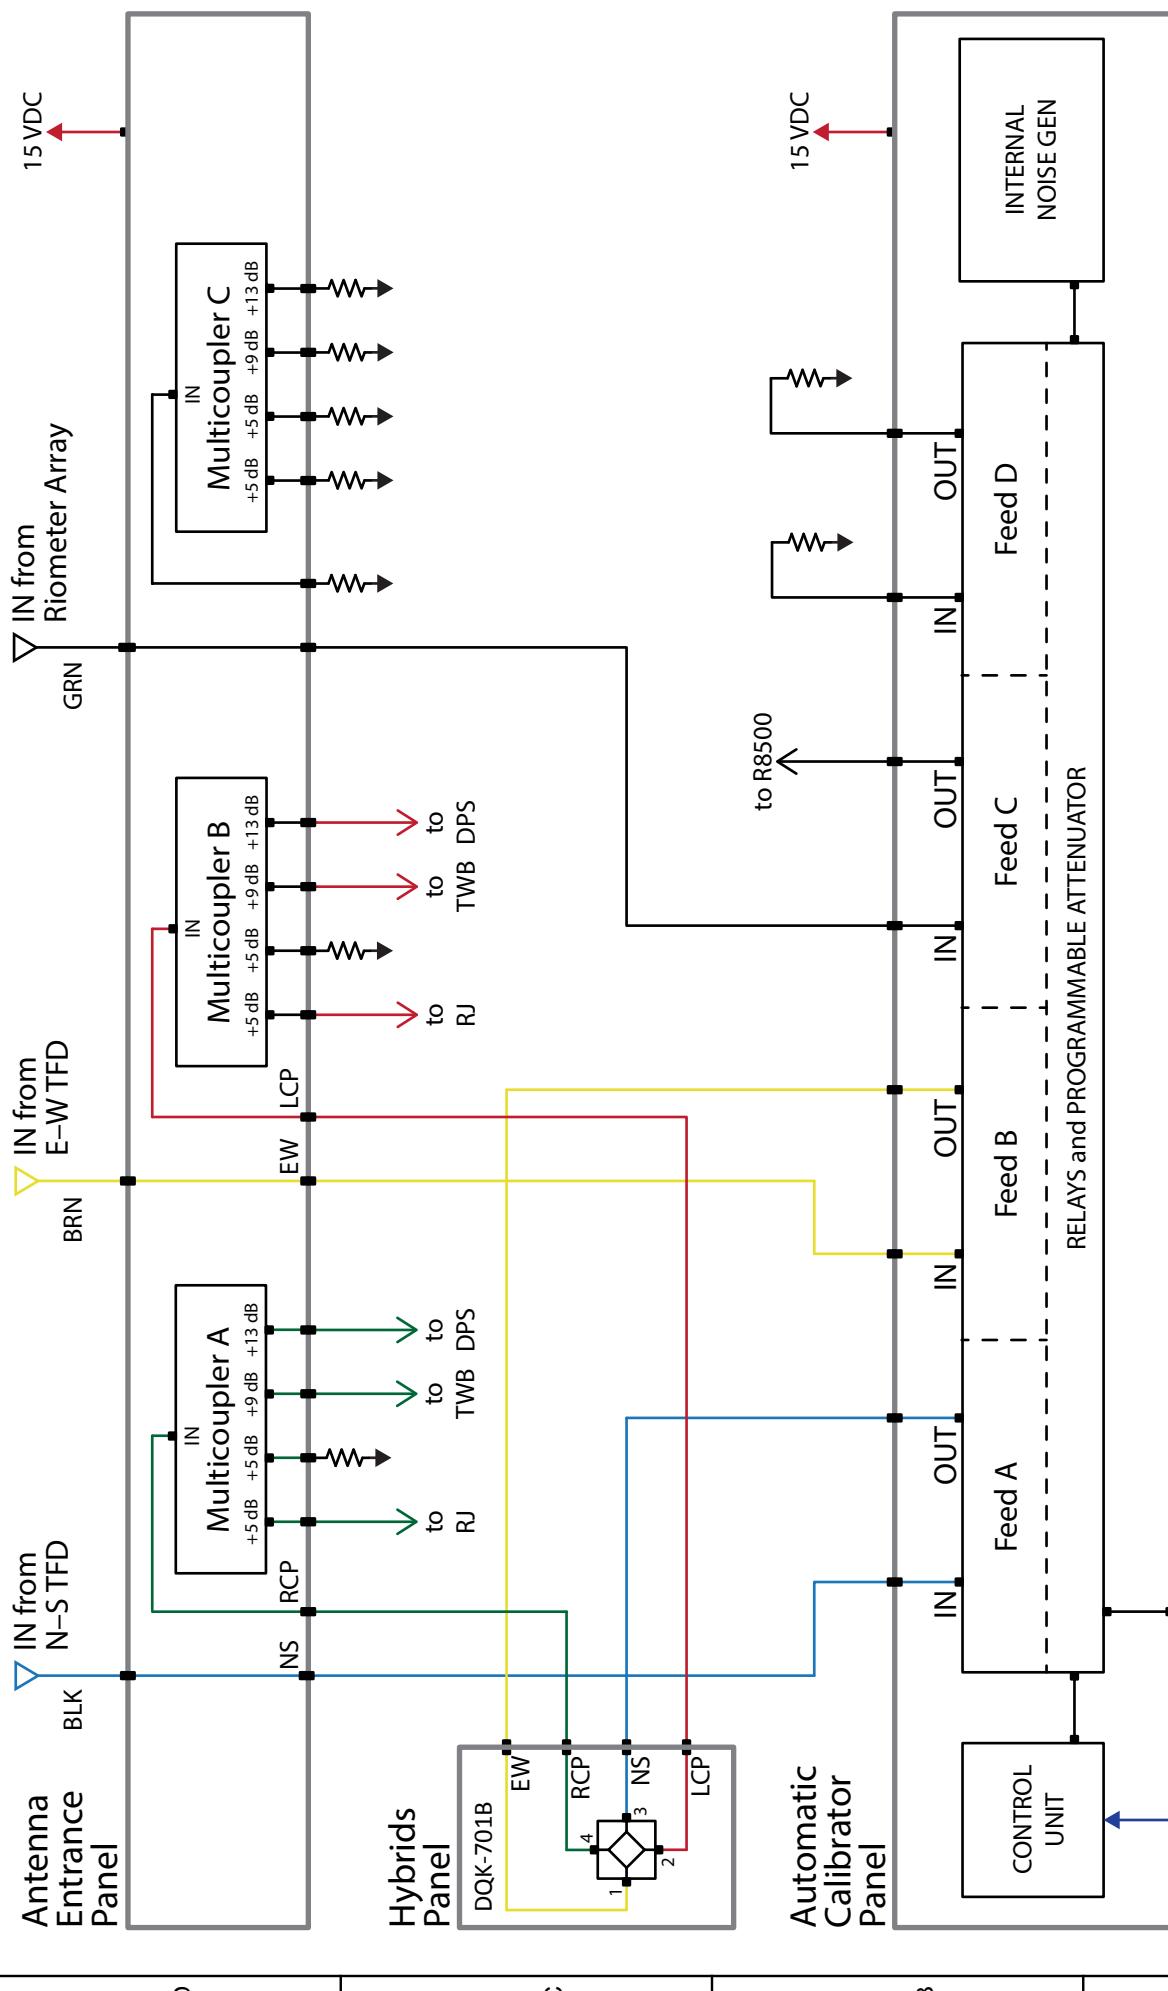

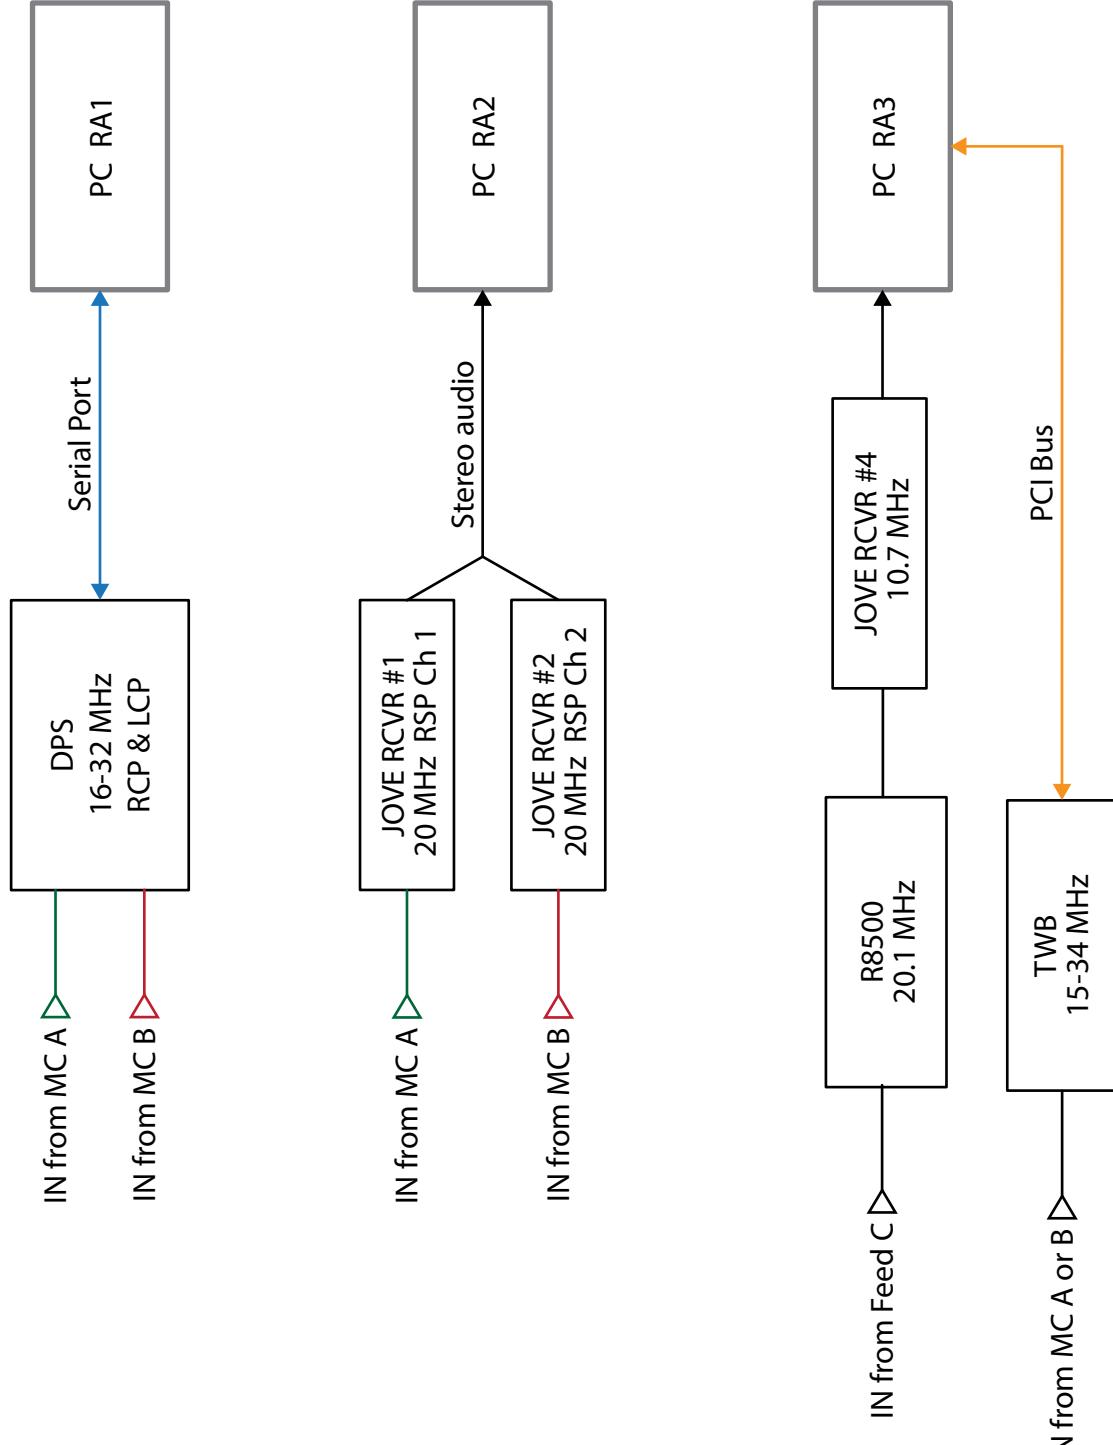

## Receivers

AJ4C  
OBSERVATORY

SIZE	DATE	PART NUMBER	REV
A	18 JUN 2017	N/A	G
SCALE	NONE	DRAWN BY DAVE TYPINSKI	SHEET 1 OF 1

4 3 2 1

D T<sub>o</sub> (K) 290  
Noise Source Temperature (MK) 500  
Splitter Loss @ 20 MHz (dB) 6.2  
Antenna Feed Loss @ 20 MHz (dB) 4.3  
DPS Noise Figure @ 20 MHz (dB) 3.4 = 344 K @ HYBRID INPUTS**Calibration Plane: CAL relays between Antenna Feeds Entrance and Hybrid Ring Inputs.**

Nom. Att. (dB)	Meas. Att. (dB)	Observed Temp. (K)	Equivalent Antenna Temp. (K)	Nom. Att. (dB)	Meas. Att. (dB)	Observed Temp. (K)	Equivalent Antenna Temp. (K)
0	0.56	105 MK	284 MK	0	0.56	105 MK	284 MK
1	1.52	84.5 MK	227 MK	3	3.43	54.4 MK	147 MK
2	2.56	66.5 MK	179 MK	6	6.47	27.0 MK	72.8 MK
4	4.57	41.9 MK	113 MK	9	9.45	13.6 MK	36.6 MK
8	8.55	16.7 MK	45.1 MK	12	12.58	6.62 MK	17.8 MK
16	16.58	2.64 MK	7.10 MK	15	15.48	3.40 MK	9.14 MK
32	32.50	68.1 KK	182 KK	18	18.55	1.68 MK	4.51 MK
64	64.65	676 K	401 K	21	21.50	850 KK	2.29 MK
				24	24.55	421 KK	1.13 MK
B				27	27.51	213 KK	573 KK
				30	30.58	106 KK	283 KK
				33	33.49	54.3 KK	145 KK
				36	36.54	27.2 KK	71.9 KK
				39	39.55	13.9 KK	36.1 KK
				42	42.55	7.30 KK	18.2 KK
				45	45.59	3.95 KK	9.20 KK
				48	48.55	2.31 KK	4.80 KK

C

B

D

A

A



Automatic Calibrator Temperatures  
DPS on TFD Array

REV  
C

N/A

1 OF 2

1

Calibration Temperatures

PART NUMBER  
N/A

SHEET 1 OF 2

1

D

$T_o$ (K)	290
Noise Source Temperature (MK)	500
Splitter Loss @ 20 MHz (dB)	6.2
Antenna Feed Loss @ 20 MHz (dB)	3.2
R8500 Noise Figure @ 20 MHz (dB)	6.0

(this is a GUESS and is likely higher)  
**Calibration Plane: CAL relays between Antenna Feeds Entrance and R8500 Antenna Input.**

Nom.	Meas. Att. (dB)	Observed Temp. (K)	Equivalent Antenna Temp. (K)	Nom. Att. (dB)	Meas. Att. (dB)	Observed Temp. (K)	Equivalent Antenna Temp. (K)
0	0.56	105 MK	220 MK	0	0.56	105 MK	220 MK
1	1.52	84.5 MK	177 MK	3	3.43	54.4 MK	114 MK
2	2.56	66.5 MK	139 MK	6	6.47	27.0 MK	56.5 MK
4	4.57	41.9 MK	87.5 MK	9	9.45	13.6 MK	28.4 MK
8	8.55	16.7 MK	35.0 MK	12	12.58	6.62 MK	13.8 MK
16	16.58	2.64 MK	5.51 MK	15	15.48	3.40 MK	7.10 MK
32	32.50	68.6 KK	141 KK	18	18.55	1.68 MK	3.50 MK
64	64.65	1.20 KK	376 K	21	21.50	850 KK	1.77 MK
				24	24.55	422 KK	879 KK
B				27	27.51	214 KK	445 KK
				30	30.58	106 KK	220 KK
				33	33.49	54.9 KK	112 KK
				36	36.54	27.8 KK	55.9 KK
				39	39.55	14.5 KK	28.1 KK
				42	42.55	7.82 KK	14.2 KK
				45	45.59	4.47 KK	7.21 KK
				48	48.55	2.83 KK	3.79 KK

C

B

A

A

## Automatic Calibrator Temperatures R8500 + RJ on Riometer Array



SIZE A DATE 25 MAY 2018 PART NUMBER N/A  
SCALE NONE DRAWN BY DAVE TYPINSKI SHEET 2 OF 2  
REV C

## Calibration Temperatures

Page 15 of 27

1

4


3

2

1

**15 VDC Power Requirement**

<b>Equipment</b>	<b>Draw (mA)</b>
Multicouplers	330
DPS Spectro	720
DPS IF Strips	570
Calibrator	980
TWB Rcvr	250
Jove Rcvrs	160
GPS-ntp-pi	120
	<u>Total: 3.1 Amps</u>

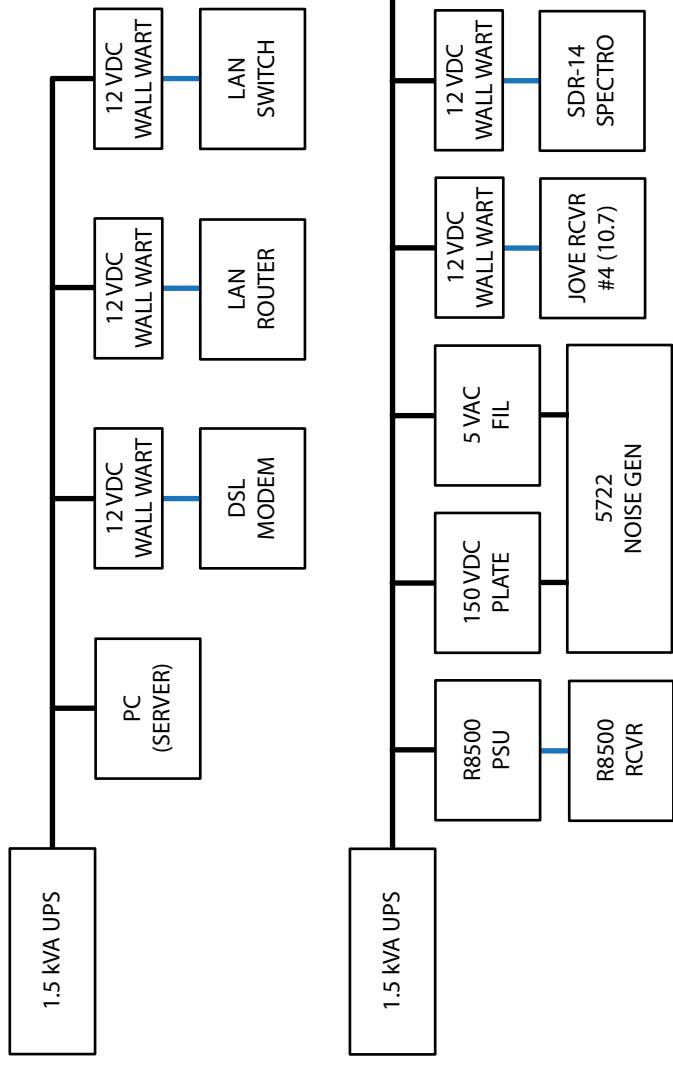


D

C

B

A

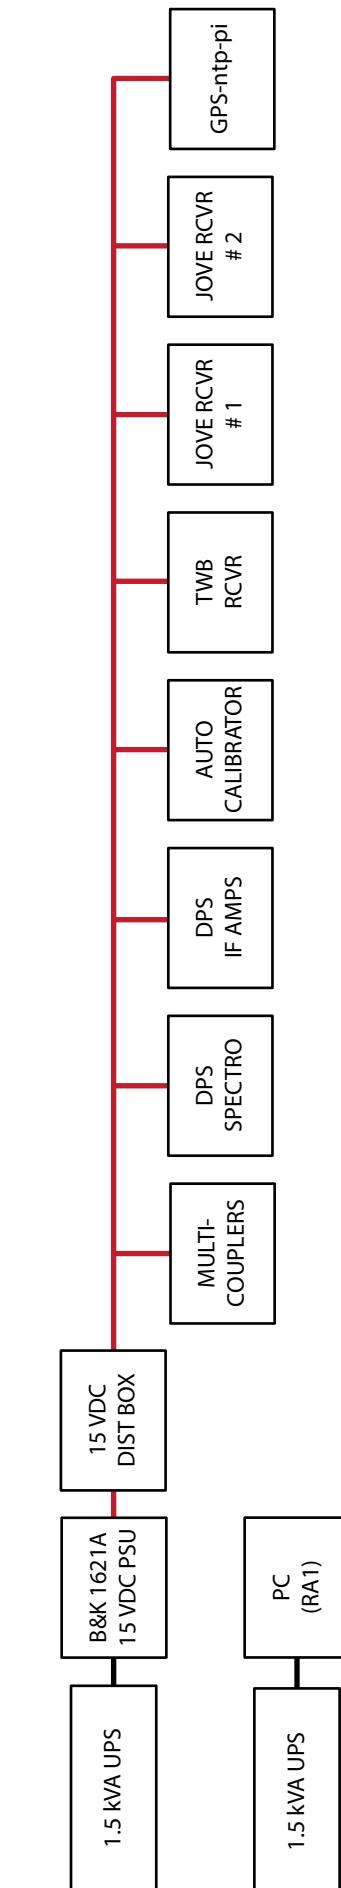

C

B

A

**Power Distribution**

SIZE	DATE	PART NUMBER
A	09 AUG 2019	N/A
SCALE	NONE	DRAWN BY DAVE TYPINSKI
		SHEET 1 OF 1

REV	C
-----	---

A

B

C

1

Page 16 of 27

## TFD Array Beam Steering

Time Delay Cable VoP: **66%**

ray elements N-S baseline spacing (feet): **32**  
Array elements E-W baseline spacing (feet): **32**

D	N-S Offset (degrees)	E-W Offset (degrees)	A (S) / B (N) C (S) / D (N)	Delay Cable Lengths (feet & inches)				AZ (degrees)	EL (degrees)
				E	F (W) / G (E)	H	I		
C	20 N	60 E	7' 2-3/4"	14' 5-1/4"	3' 7-1/4"	18' 3-1/2"	9' 1-3/4"	78	29
	20 N	45 E	7' 2-3/4"	14' 5-1/4"	3' 7-1/4"	14' 11-1/4"	7' 5-1/2"	70	43
	20 N	30 E	7' 2-3/4"	14' 5-1/4"	3' 7-1/4"	10' 6-3/4"	5' 3-1/4"	58	56
	20 N	15 E	7' 2-3/4"	14' 5-1/4"	3' 7-1/4"	5' 5-1/2"	2' 8-3/4"	36	66
	20 N	0	7' 2-3/4"	14' 5-1/4"	3' 7-1/4"	0"	0"	0	70
	20 N	15 W	7' 2-3/4"	14' 5-1/4"	3' 7-1/4"	5' 5-1/2"	2' 8-3/4"	324	66
	20 N	30 W	7' 2-3/4"	14' 5-1/4"	3' 7-1/4"	10' 6-3/4"	5' 3-1/4"	302	56
	20 N	45 W	7' 2-3/4"	14' 5-1/4"	3' 7-1/4"	14' 11-1/4"	7' 5-1/2"	290	43
	20 N	60 W	7' 2-3/4"	14' 5-1/4"	3' 7-1/4"	18' 3-1/2"	9' 1-3/4"	282	29
	15 N	60 E	5' 5-1/2"	10' 11-1/4"	2' 8-3/4"	18' 3-1/2"	9' 1-3/4"	81	30
B	15 N	45 E	5' 5-1/2"	10' 11-1/4"	2' 8-3/4"	14' 11-1/4"	7' 5-1/2"	75	44
	15 N	30 E	5' 5-1/2"	10' 11-1/4"	2' 8-3/4"	10' 6-3/4"	5' 3-1/4"	65	58
	15 N	15 E	5' 5-1/2"	10' 11-1/4"	2' 8-3/4"	5' 5-1/2"	2' 8-3/4"	45	69
	15 N	0	5' 5-1/2"	10' 11-1/4"	2' 8-3/4"	0"	0"	360	75
	15 N	15 W	5' 5-1/2"	10' 11-1/4"	2' 8-3/4"	5' 5-1/2"	2' 8-3/4"	315	69
	15 N	30 W	5' 5-1/2"	10' 11-1/4"	2' 8-3/4"	10' 6-3/4"	5' 3-1/4"	295	58
	15 N	45 W	5' 5-1/2"	10' 11-1/4"	2' 8-3/4"	14' 11-1/4"	7' 5-1/2"	285	44
	15 N	60 W	5' 5-1/2"	10' 11-1/4"	2' 8-3/4"	18' 3-1/2"	9' 1-3/4"	279	30
	10 N	60 E	3' 8"	7' 4"	1' 10"	18' 3-1/2"	9' 1-3/4"	84	30
	10 N	45 E	3' 8"	7' 4"	1' 10"	14' 11-1/4"	7' 5-1/2"	80	45
A	10 N	30 E	3' 8"	7' 4"	1' 10"	10' 6-3/4"	5' 3-1/4"	73	59
	10 N	15 E	3' 8"	7' 4"	1' 10"	5' 5-1/2"	2' 8-3/4"	57	72
	10 N	0	3' 8"	7' 4"	1' 10"	0"	0"	360	80
	10 N	15 W	3' 8"	7' 4"	1' 10"	5' 5-1/2"	2' 8-3/4"	303	72
	10 N	30 W	3' 8"	7' 4"	1' 10"	10' 6-3/4"	5' 3-1/4"	287	59
	10 N	45 W	3' 8"	7' 4"	1' 10"	14' 11-1/4"	7' 5-1/2"	280	45
	10 N	60 W	3' 8"	7' 4"	1' 10"	18' 3-1/2"	9' 1-3/4"	276	30
	4	3	2						

## TFD Array Beam Steering



SIZE	DATE	PART NUMBER	REV
A	01 OCT 2014	N/A	A
SCALE	NONE	DRAWN BY	SHEET
		DAVE TYPINSKI	1 OF 6
			1

1

4

2

3

## TFD Array Beam Steering

Time Delay Cable VoP: 66%

Array elements N-S baseline spacing (feet): 32  
Array elements E-W baseline spacing (feet): 32

		Delay Cable Lengths (feet & inches)						AZ (degrees)	EL (degrees)	D
		A (S) / B (N)		C (S) / D (N)		E	F (W) / G (E)	H		
D	N-S Offset (degrees)	E-W Offset (degrees)								C
5 N	60 E	1' 10"	3' 8-1/4"	11"	18' 3-1/2"	9' 1-3/4"	87	30		
	45 E	1' 10"	3' 8-1/4"	11"	14' 11-1/4"	7' 5-1/2"	85	45		
	30 E	1' 10"	3' 8-1/4"	11"	10' 6-3/4"	5' 3-1/4"	81	60		
	15 E	1' 10"	3' 8-1/4"	11"	5' 5-1/2"	2' 8-3/4"	72	74		
	0	1' 10"	3' 8-1/4"	11"	0"	0"	360	85		
	15 W	1' 10"	3' 8-1/4"	11"	5' 5-1/2"	2' 8-3/4"	288	74		
	30 W	1' 10"	3' 8-1/4"	11"	10' 6-3/4"	5' 3-1/4"	279	60		
	45 W	1' 10"	3' 8-1/4"	11"	14' 11-1/4"	7' 5-1/2"	275	45		
	60 W	1' 10"	3' 8-1/4"	11"	18' 3-1/2"	9' 1-3/4"	273	30		
C	0	60 E	0"	0"	18' 3-1/2"	9' 1-3/4"	90	30		
	0	45 E	0"	0"	14' 11-1/4"	7' 5-1/2"	90	45		
	0	30 E	0"	0"	10' 6-3/4"	5' 3-1/4"	90	60		
	0	15 E	0"	0"	5' 5-1/2"	2' 8-3/4"	90	75		
	0	0	0"	0"	0"	0"	180	90		
	0	15 W	0"	0"	5' 5-1/2"	2' 8-3/4"	270	75		
	0	30 W	0"	0"	10' 6-3/4"	5' 3-1/4"	270	60		
	0	45 W	0"	0"	14' 11-1/4"	7' 5-1/2"	270	45		
	0	60 W	0"	0"	18' 3-1/2"	9' 1-3/4"	270	30		
B	5 S	60 E	1' 10"	3' 8-1/4"	11"	18' 3-1/2"	9' 1-3/4"	93	30	
	5 S	45 E	1' 10"	3' 8-1/4"	11"	14' 11-1/4"	7' 5-1/2"	95	45	
	5 S	30 E	1' 10"	3' 8-1/4"	11"	10' 6-3/4"	5' 3-1/4"	99	60	
	5 S	15 E	1' 10"	3' 8-1/4"	11"	5' 5-1/2"	2' 8-3/4"	108	74	
	5 S	0	1' 10"	3' 8-1/4"	11"	0"	0"	180	85	
	5 S	15 W	1' 10"	3' 8-1/4"	11"	5' 5-1/2"	2' 8-3/4"	252	74	
	5 S	30 W	1' 10"	3' 8-1/4"	11"	10' 6-3/4"	5' 3-1/4"	261	60	
	5 S	45 W	1' 10"	3' 8-1/4"	11"	14' 11-1/4"	7' 5-1/2"	265	45	
	5 S	60 W	1' 10"	3' 8-1/4"	11"	18' 3-1/2"	9' 1-3/4"	267	30	

## TFD Array Beam Steering



SIZE	DATE	PART NUMBER	REV
A	01 OCT 2014	N/A	A
SCALE	NONE	DRAWN BY DAVE TYPINSKI	SHEET 2 OF 6
	2		1

1

2

3

4

## TFD Array Beam Steering

**Time Delay Cable VoP:** 66%

Array elements N-S baseline spacing (feet): 32  
Array elements E-W baseline spacing (feet): 32

		Delay Cable Lengths (feet & inches)											
D	N-S Offset (degrees)	E-W Offset (degrees)	A (S) / B (N)	C (S) / D (N)	E	F (W) / G (E)	H	I	J	K	L	M	
C	10 S	60 E	3' 8"	7' 4"	1' 10"	18' 3-1/2"	9' 1-3/4"	96	30				
	10 S	45 E	3' 8"	7' 4"	1' 10"	14' 11-1/4"	7' 5-1/2"	100	45				
	10 S	30 E	3' 8"	7' 4"	1' 10"	10' 6-3/4"	5' 3-1/4"	107	59				
	10 S	15 E	3' 8"	7' 4"	1' 10"	5' 5-1/2"	2' 8-3/4"	123	72				
	10 S	0	3' 8"	7' 4"	1' 10"	0"	0"	180	80				
	10 S	15 W	3' 8"	7' 4"	1' 10"	5' 5-1/2"	2' 8-3/4"	237	72				
	10 S	30 W	3' 8"	7' 4"	1' 10"	10' 6-3/4"	5' 3-1/4"	253	59				
	10 S	45 W	3' 8"	7' 4"	1' 10"	14' 11-1/4"	7' 5-1/2"	260	45				
	10 S	60 W	3' 8"	7' 4"	1' 10"	18' 3-1/2"	9' 1-3/4"	264	30				
B	15 S	60 E	5' 5-1/2"	10' 11-1/4"	2' 8-3/4"	18' 3-1/2"	9' 1-3/4"	99	30				
	15 S	45 E	5' 5-1/2"	10' 11-1/4"	2' 8-3/4"	14' 11-1/4"	7' 5-1/2"	105	44				
	15 S	30 E	5' 5-1/2"	10' 11-1/4"	2' 8-3/4"	10' 6-3/4"	5' 3-1/4"	115	58				
	15 S	15 E	5' 5-1/2"	10' 11-1/4"	2' 8-3/4"	5' 5-1/2"	2' 8-3/4"	135	69				
	15 S	0	5' 5-1/2"	10' 11-1/4"	2' 8-3/4"	0"	0"	180	75				
	15 S	15 W	5' 5-1/2"	10' 11-1/4"	2' 8-3/4"	5' 5-1/2"	2' 8-3/4"	225	69				
	15 S	30 W	5' 5-1/2"	10' 11-1/4"	2' 8-3/4"	10' 6-3/4"	5' 3-1/4"	245	58				
	15 S	45 W	5' 5-1/2"	10' 11-1/4"	2' 8-3/4"	14' 11-1/4"	7' 5-1/2"	255	44				
	15 S	60 W	5' 5-1/2"	10' 11-1/4"	2' 8-3/4"	18' 3-1/2"	9' 1-3/4"	261	30				

## TFD Array Beam Steering



REV A  
PART NUMBER N/A  
SHEET 3 OF 6

## TFD Array Beam Steering

Time Delay Cable VoP:

66%

Array elements N-S baseline spacing (feet):  
Array elements E-W baseline spacing (feet):

32  
32

**TFD Array Beam Steering**

		Delay Cable Lengths (feet & inches)						AZ (degrees)	EL (degrees)
D	N-S Offset (degrees)	E-W Offset (degrees)	A (S) / B (N)	C (S) / D (N)	E	F (W) / G (E)	H		
D	25 S	60 E	8' 11"	17' 10-1/4"	4' 5-1/2"	18' 3-1/2"	9' 1-3/4"	105	29
	25 S	45 E	8' 11"	17' 10-1/4"	4' 5-1/2"	14' 11-1/4"	7' 5-1/2"	115	42
	25 S	30 E	8' 11"	17' 10-1/4"	4' 5-1/2"	10' 6-3/4"	5' 3-1/4"	129	53
	25 S	15 E	8' 11"	17' 10-1/4"	4' 5-1/2"	5' 5-1/2"	2' 8-3/4"	150	62
	25 S	0	8' 11"	17' 10-1/4"	4' 5-1/2"	0"	0"	180	65
	25 S	15 W	8' 11"	17' 10-1/4"	4' 5-1/2"	5' 5-1/2"	2' 8-3/4"	210	62
	25 S	30 W	8' 11"	17' 10-1/4"	4' 5-1/2"	10' 6-3/4"	5' 3-1/4"	231	53
	25 S	45 W	8' 11"	17' 10-1/4"	4' 5-1/2"	14' 11-1/4"	7' 5-1/2"	245	42
	25 S	60 W	8' 11"	17' 10-1/4"	4' 5-1/2"	18' 3-1/2"	9' 1-3/4"	255	29

		Delay Cable Lengths (feet & inches)						AZ (degrees)	EL (degrees)
C	N-S Offset (degrees)	E-W Offset (degrees)	A (S) / B (N)	C (S) / D (N)	E	F (W) / G (E)	H		
C	30 S	60 E	10' 6-3/4"	21' 1-1/2"	5' 3-1/4"	18' 3-1/2"	9' 1-3/4"	108	29
	30 S	45 E	10' 6-3/4"	21' 1-1/2"	5' 3-1/4"	14' 11-1/4"	7' 5-1/2"	120	41
	30 S	30 E	10' 6-3/4"	21' 1-1/2"	5' 3-1/4"	10' 6-3/4"	5' 3-1/4"	135	51
	30 S	15 E	10' 6-3/4"	21' 1-1/2"	5' 3-1/4"	5' 5-1/2"	2' 8-3/4"	155	58
	30 S	0	10' 6-3/4"	21' 1-1/2"	5' 3-1/4"	0"	0"	180	60
	30 S	15 W	10' 6-3/4"	21' 1-1/2"	5' 3-1/4"	5' 5-1/2"	2' 8-3/4"	205	58
	30 S	30 W	10' 6-3/4"	21' 1-1/2"	5' 3-1/4"	10' 6-3/4"	5' 3-1/4"	225	51
	30 S	45 W	10' 6-3/4"	21' 1-1/2"	5' 3-1/4"	14' 11-1/4"	7' 5-1/2"	240	41
	30 S	60 W	10' 6-3/4"	21' 1-1/2"	5' 3-1/4"	18' 3-1/2"	9' 1-3/4"	252	29

		Delay Cable Lengths (feet & inches)						AZ (degrees)	EL (degrees)
B	N-S Offset (degrees)	E-W Offset (degrees)	A (S) / B (N)	C (S) / D (N)	E	F (W) / G (E)	H		
B	35 S	60 E	12' 1-1/4"	24' 2-3/4"	6' 0-3/4"	18' 3-1/2"	9' 1-3/4"	112	28
	35 S	45 E	12' 1-1/4"	24' 2-3/4"	6' 0-3/4"	14' 11-1/4"	7' 5-1/2"	125	39
	35 S	30 E	12' 1-1/4"	24' 2-3/4"	6' 0-3/4"	10' 6-3/4"	5' 3-1/4"	140	48
	35 S	15 E	12' 1-1/4"	24' 2-3/4"	6' 0-3/4"	5' 5-1/2"	2' 8-3/4"	159	53
	35 S	0	12' 1-1/4"	24' 2-3/4"	6' 0-3/4"	0"	0"	180	55
	35 S	15 W	12' 1-1/4"	24' 2-3/4"	6' 0-3/4"	5' 5-1/2"	2' 8-3/4"	201	53
	35 S	30 W	12' 1-1/4"	24' 2-3/4"	6' 0-3/4"	10' 6-3/4"	5' 3-1/4"	220	48
	35 S	45 W	12' 1-1/4"	24' 2-3/4"	6' 0-3/4"	14' 11-1/4"	7' 5-1/2"	235	39
	35 S	60 W	12' 1-1/4"	24' 2-3/4"	6' 0-3/4"	18' 3-1/2"	9' 1-3/4"	248	28

		Delay Cable Lengths (feet & inches)						AZ (degrees)	EL (degrees)
A	N-S Offset (degrees)	E-W Offset (degrees)	A (S) / B (N)	C (S) / D (N)	E	F (W) / G (E)	H		
A	45 E	12' 1-1/4"	24' 2-3/4"	6' 0-3/4"	18' 3-1/2"	9' 1-3/4"	112	28	
	45 W	12' 1-1/4"	24' 2-3/4"	6' 0-3/4"	14' 11-1/4"	7' 5-1/2"	125	39	

## TFD Array Beam Steering



OBSERVATORY

SIZE A DATE 01 OCT 2014 DRAWN BY DAVE TYPINSKI

SCALE NONE PART NUMBER N/A

REV A SHEET 4 OF 6

1

## TFD Array Beam Steering

Time Delay Cable VoP:

66%

Array elements N-S baseline spacing (feet):  
Array elements E-W baseline spacing (feet):

32  
32

		Delay Cable Lengths (feet & inches)						AZ (degrees)		EL (degrees)	
D	N-S Offset (degrees)	E-W Offset (degrees)	A (S) / B (N)	C (S) / D (N)	E	F (W) / G (E)	H				D
C	40 S	60 E	13' 7"	27' 1-3/4"	6' 9-1/2"	18' 3-1/2"	9' 1-3/4"	116	27		
	40 S	45 E	13' 7"	27' 1-3/4"	6' 9-1/2"	14' 11-1/4"	7' 5-1/2"	130	37		
	40 S	30 E	13' 7"	27' 1-3/4"	6' 9-1/2"	10' 6-3/4"	5' 3-1/4"	145	44		
	40 S	15 E	13' 7"	27' 1-3/4"	6' 9-1/2"	5' 5-1/2"	2' 8-3/4"	162	49		
	40 S	0	13' 7"	27' 1-3/4"	6' 9-1/2"	0"	0"	180	50		
	40 S	15 W	13' 7"	27' 1-3/4"	6' 9-1/2"	5' 5-1/2"	2' 8-3/4"	198	49		
	40 S	30 W	13' 7"	27' 1-3/4"	6' 9-1/2"	10' 6-3/4"	5' 3-1/4"	215	44		
	40 S	45 W	13' 7"	27' 1-3/4"	6' 9-1/2"	14' 11-1/4"	7' 5-1/2"	230	37		
	40 S	60 W	13' 7"	27' 1-3/4"	6' 9-1/2"	18' 3-1/2"	9' 1-3/4"	244	27		
	45 S	60 E	14' 11-1/4"	29' 10-1/2"	7' 5-1/2"	18' 3-1/2"	9' 1-3/4"	120	27		
B	45 S	45 E	14' 11-1/4"	29' 10-1/2"	7' 5-1/2"	14' 11-1/4"	7' 5-1/2"	135	35		
	45 S	30 E	14' 11-1/4"	29' 10-1/2"	7' 5-1/2"	10' 6-3/4"	5' 3-1/4"	150	41		
	45 S	15 E	14' 11-1/4"	29' 10-1/2"	7' 5-1/2"	5' 5-1/2"	2' 8-3/4"	165	44		
	45 S	0	14' 11-1/4"	29' 10-1/2"	7' 5-1/2"	0"	0"	180	45		
	45 S	15 W	14' 11-1/4"	29' 10-1/2"	7' 5-1/2"	5' 5-1/2"	2' 8-3/4"	195	44		
	45 S	30 W	14' 11-1/4"	29' 10-1/2"	7' 5-1/2"	10' 6-3/4"	5' 3-1/4"	210	41		
	45 S	45 W	14' 11-1/4"	29' 10-1/2"	7' 5-1/2"	14' 11-1/4"	7' 5-1/2"	225	35		
	45 S	60 W	14' 11-1/4"	29' 10-1/2"	7' 5-1/2"	18' 3-1/2"	9' 1-3/4"	240	27		
	50 S	60 E	16' 2-1/4"	32' 4-1/4"	8' 1"	18' 3-1/2"	9' 1-3/4"	125	25		
	50 S	45 E	16' 2-1/4"	32' 4-1/4"	8' 1"	14' 11-1/4"	7' 5-1/2"	140	33		
A	50 S	30 E	16' 2-1/4"	32' 4-1/4"	8' 1"	10' 6-3/4"	5' 3-1/4"	154	37		
	50 S	15 E	16' 2-1/4"	32' 4-1/4"	8' 1"	5' 5-1/2"	2' 8-3/4"	167	39		
	50 S	0	16' 2-1/4"	32' 4-1/4"	8' 1"	0"	0"	180	40		
	50 S	15 W	16' 2-1/4"	32' 4-1/4"	8' 1"	5' 5-1/2"	2' 8-3/4"	193	39		
	50 S	30 W	16' 2-1/4"	32' 4-1/4"	8' 1"	10' 6-3/4"	5' 3-1/4"	206	37		
	50 S	45 W	16' 2-1/4"	32' 4-1/4"	8' 1"	14' 11-1/4"	7' 5-1/2"	220	33		
	50 S	60 W	16' 2-1/4"	32' 4-1/4"	8' 1"	18' 3-1/2"	9' 1-3/4"	235	25		
	55 S	60 E	17' 2-1/4"	33' 4-1/4"	9' 1"	18' 3-1/2"	9' 1-3/4"	130	27		
	55 S	45 E	17' 2-1/4"	33' 4-1/4"	9' 1"	14' 11-1/4"	7' 5-1/2"	145	37		
	55 S	30 E	17' 2-1/4"	33' 4-1/4"	9' 1"	10' 6-3/4"	5' 3-1/4"	154	41		

## TFD Array Beam Steering



SIZE	DATE	PART NUMBER	REV
A	01 OCT 2014	N/A	A
SCALE	NONE	DRAWN BY DAVE TYPINSKI	SHEET 5 OF 6

## TFD Array Beam Steering

Time Delay Cable VoP:

66%      Array elements N-S baseline spacing (feet): 32  
 Array elements E-W baseline spacing (feet): 32

D	N-S Offset (degrees)	E-W Offset (degrees)	<b>A (S) / B (N) C (S) / D (N)</b>	Delay Cable Lengths (feet & inches)			<b>AZ (degrees)</b>	<b>EL (degrees)</b>
				<b>E</b>	<b>F (W) / G (E)</b>	<b>H</b>		
55 S	60 E	17' 3-1/2"	34' 7-1/4"	8' 7-3/4"	18' 3-1/2"	9' 1-3/4"	130	24
55 S	45 E	17' 3-1/2"	34' 7-1/4"	8' 7-3/4"	14' 11-1/4"	7' 5-1/2"	145	30
55 S	30 E	17' 3-1/2"	34' 7-1/4"	8' 7-3/4"	10' 6-3/4"	5' 3-1/4"	158	33
55 S	15 E	17' 3-1/2"	34' 7-1/4"	8' 7-3/4"	5' 5-1/2"	2' 8-3/4"	169	35
55 S	0	17' 3-1/2"	34' 7-1/4"	8' 7-3/4"	0"	0"	180	35
55 S	15 W	17' 3-1/2"	34' 7-1/4"	8' 7-3/4"	5' 5-1/2"	2' 8-3/4"	191	35
55 S	30 W	17' 3-1/2"	34' 7-1/4"	8' 7-3/4"	10' 6-3/4"	5' 3-1/4"	202	33
55 S	45 W	17' 3-1/2"	34' 7-1/4"	8' 7-3/4"	14' 11-1/4"	7' 5-1/2"	215	30
55 S	60 W	17' 3-1/2"	34' 7-1/4"	8' 7-3/4"	18' 3-1/2"	9' 1-3/4"	230	24

C	60 S	60 E	<b>A (S) / B (N) C (S) / D (N)</b>	Delay Cable Lengths (feet & inches)			<b>AZ (degrees)</b>	<b>EL (degrees)</b>
				<b>E</b>	<b>F (W) / G (E)</b>	<b>H</b>		
60 S	60 E	18' 3-1/2"	36' 7"	9' 1-3/4"	18' 3-1/2"	9' 1-3/4"	135	22
60 S	45 E	18' 3-1/2"	36' 7"	9' 1-3/4"	14' 11-1/4"	7' 5-1/2"	150	27
60 S	30 E	18' 3-1/2"	36' 7"	9' 1-3/4"	10' 6-3/4"	5' 3-1/4"	162	29
60 S	15 E	18' 3-1/2"	36' 7"	9' 1-3/4"	5' 5-1/2"	2' 8-3/4"	171	30
60 S	0	18' 3-1/2"	36' 7"	9' 1-3/4"	0"	0"	180	30
60 S	15 W	18' 3-1/2"	36' 7"	9' 1-3/4"	5' 5-1/2"	2' 8-3/4"	189	30
60 S	30 W	18' 3-1/2"	36' 7"	9' 1-3/4"	10' 6-3/4"	5' 3-1/4"	198	29
60 S	45 W	18' 3-1/2"	36' 7"	9' 1-3/4"	14' 11-1/4"	7' 5-1/2"	210	27
60 S	60 W	18' 3-1/2"	36' 7"	9' 1-3/4"	18' 3-1/2"	9' 1-3/4"	225	22

B

B

A	TFD Array Beam Steering			REV A
	SIZE A	DATE 01 OCT 2014	PART NUMBER <b>N/A</b>	
	SCALE NONE	DRAWN BY DAVE TYPINSKI	SHEET 6 OF 6	1



**AJ4C**  
OBSERVATORY


SIZE  
A

DATE  
01 OCT 2014

PART NUMBER  
**N/A**

REV  
A

SHEET  
6 OF 6

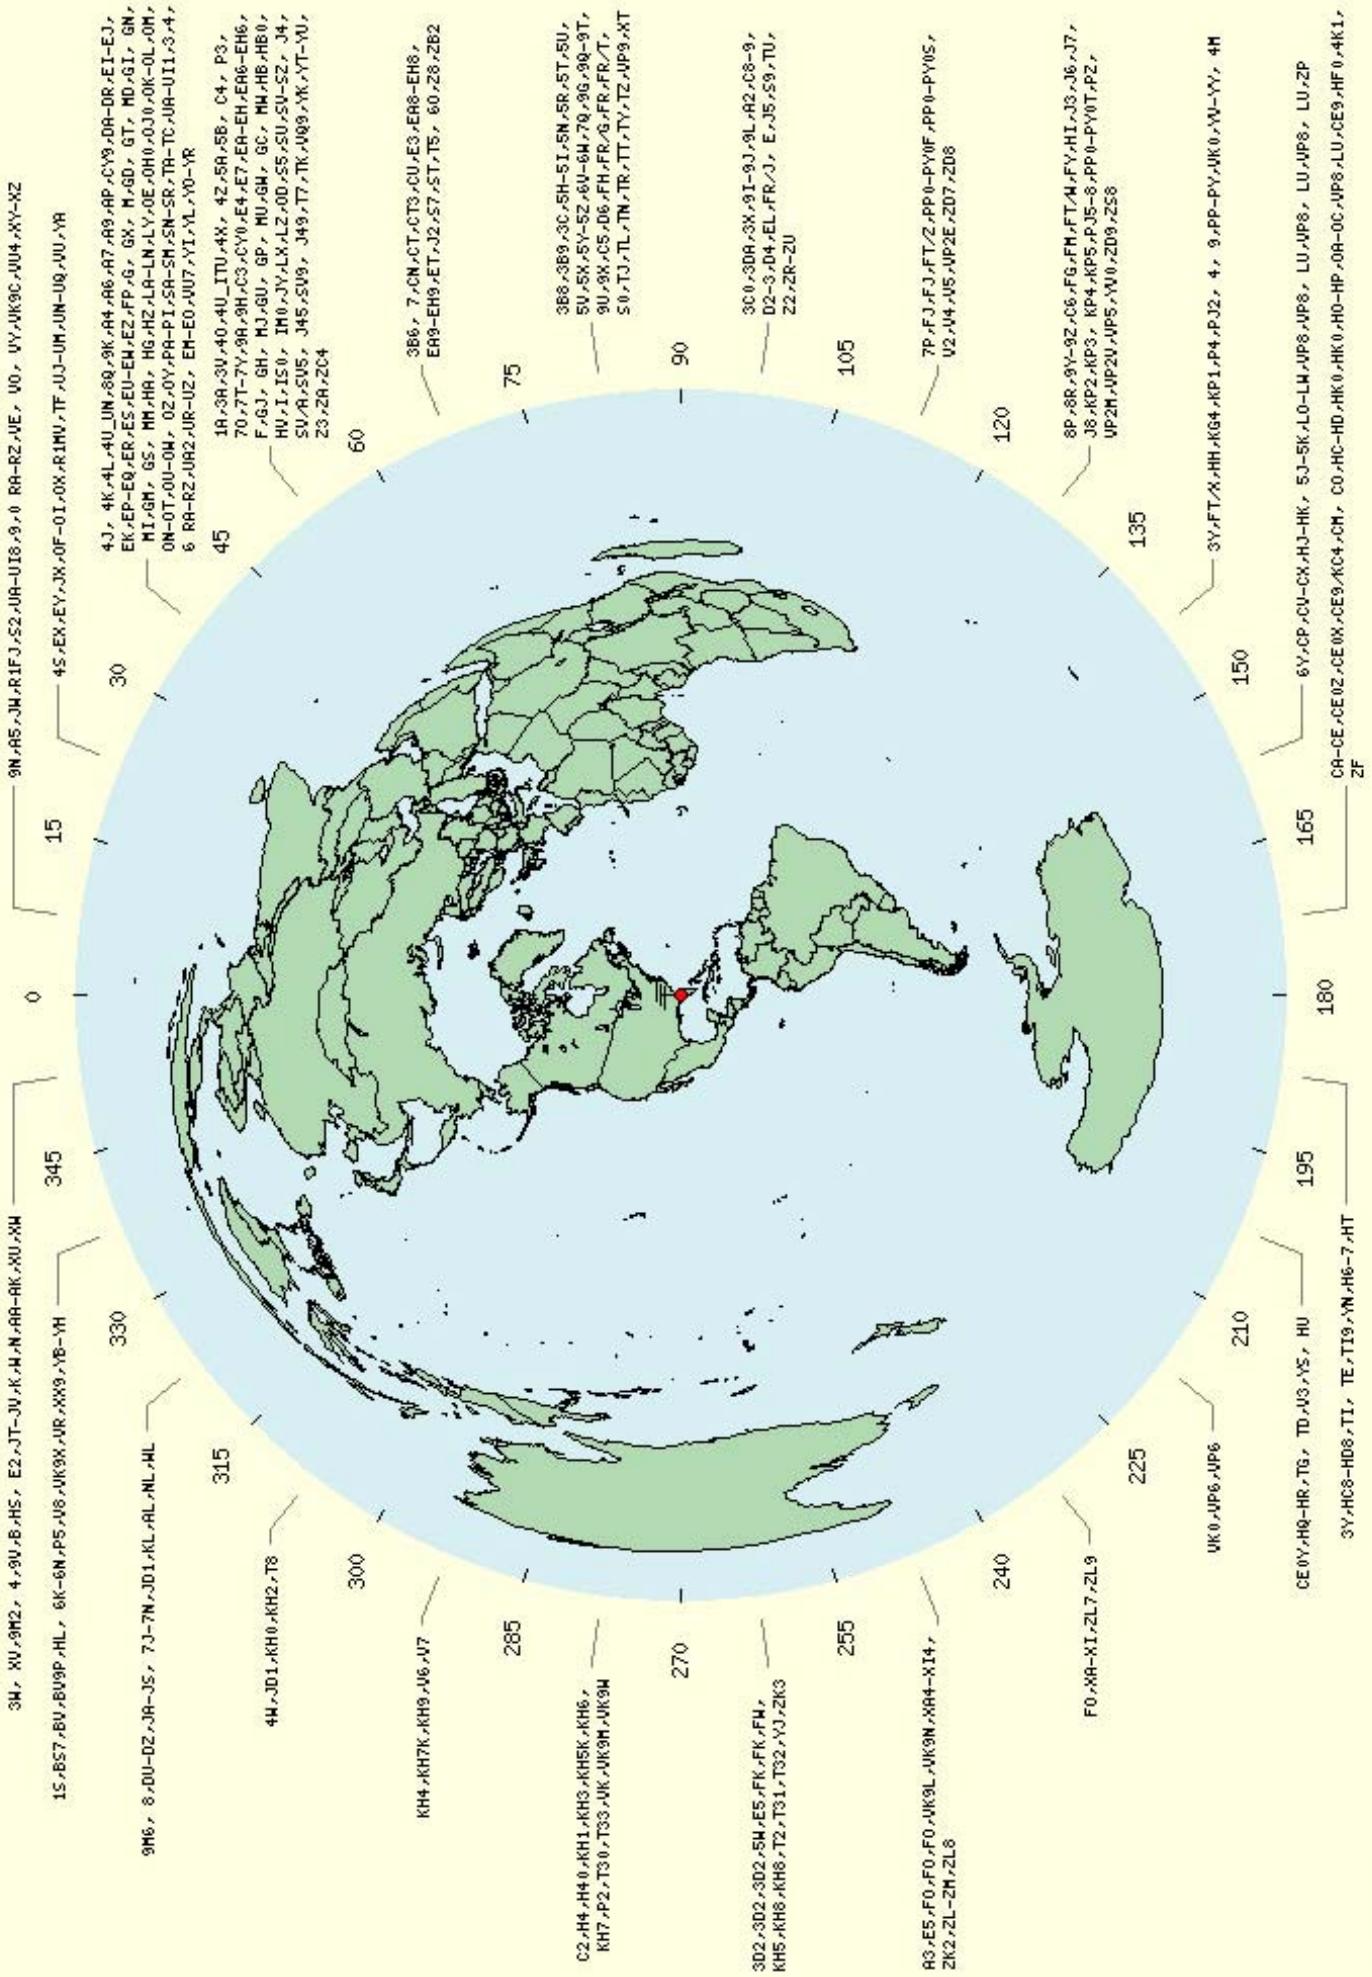



## Find the magnetic declination at your location

Find your location or click on the map to display your magnetic declination

[Browse countries](#) [What is Magnetic Declination?](#)

### Sites of Interest

[Real Time Cinema](#)  
[Satellite tracking](#)  
[Radio Astronomy](#)


### Find your location

high springs  
USA  
FLORIDA

[::SEARCH MAP::](#)


[Browse countries](#)

1 HIGH SPRINGS FL

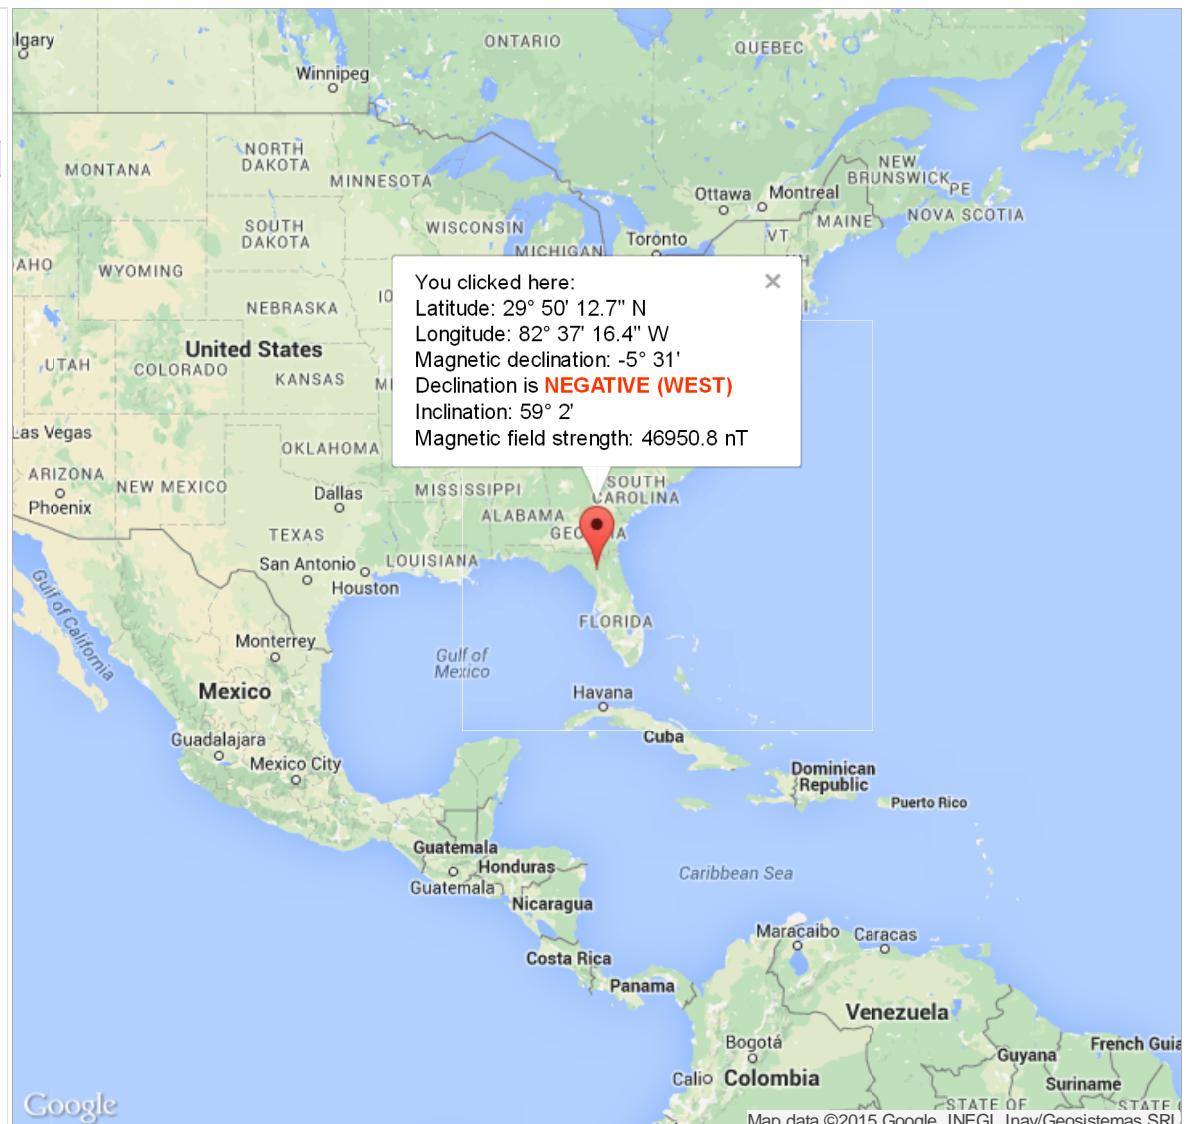

[SHARE](#)    ...

Copyright ©2015 Magnetic-Declination.com  
Questions? [webmaster@magnetic-declination.com](mailto:webmaster@magnetic-declination.com)

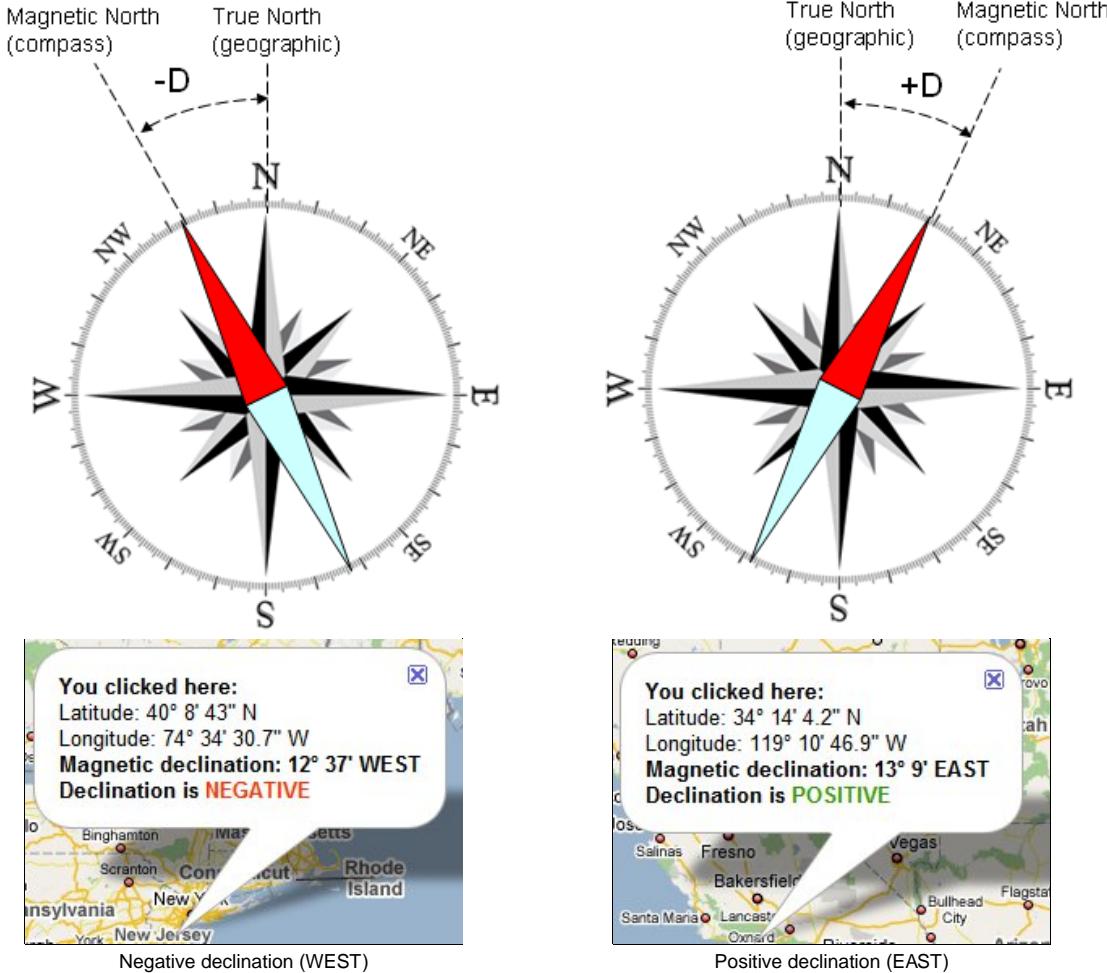

#### How can we calculate declination at any given place?


One way would be to use declination maps. Unfortunately because of secular variation, declination values are constantly changing. When printed maps were the only way of getting this information, the declination values were somewhat out of date by the time the maps got to the general public.

Another way would be to perform a prediction. This should be based on a world-wide empirical model of the deep flows. This [web page](#) operated by the National Geophysical Data Center (NDGC) offers a pretty good value for declination. The model reflects a highly predictable rate of change, and will usually be more accurate than a map, and almost never less accurate.

The best way however is to use [the current web site](#), which offers in a graphical format using Google Maps API the computed declination for any place on Earth. The algorithm implements the [World Magnetic Model WMM2015](#).

SHARE

Copyright ©2015 Magnetic-Declination.com  
Questions? [webmaster@magnetic-declination.com](mailto:webmaster@magnetic-declination.com)

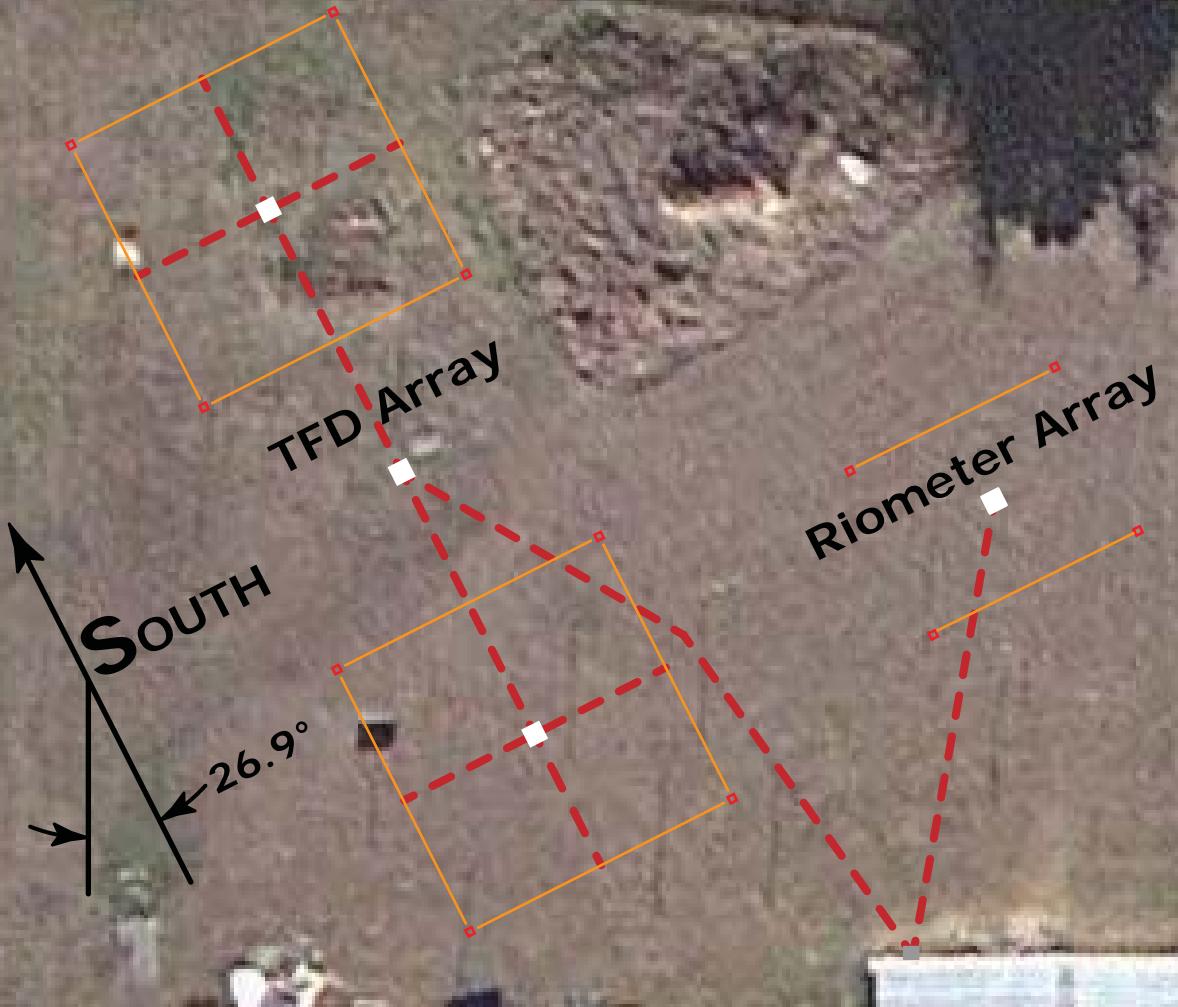

DATE: 18 JUN 2017

SCALE: 1" = 20' 2"

**AJ4CO**  
OBSERVATORY

**UFRO**

**AJ4CO**  
OBSERVATORY

**LGM**

